

### 833 Creta - UGR<17

Creta is the new recessed LED backlighting ceiling fixture that opens up a whole different way of thinking about artificial lighting; it offers a very bright and diffused lighting, while keeping energy consumptions extremely low and setting itself as the ideal solution for general and functional lighting applications. Fixture with a thin design and lenticular optics, ideal in environments that require a controlled lighting distribution and maximum visual comfort (UGR<17).

Rapid wiring connection, the fixture does not need to be opened, it can be easily embedded into a ceiling, and almost no need for maintenance.

Fixture complete with external driver. It can be easily installed in false ceilings. Housing: in galvanised steel sheet, contact mounting on the cross T structure.

Frame: in aluminium.

Optics: secondary lenses in PMMA with high transparency and non-yellowing properties.


UGR glare index: UGR<17 (in any situation) - EN 12464.

Wiring: rapid wiring connection, the fixture does not need to be opened.

LED: Luminous flux maintenance 80%; 50.000h (L80B20).

Power factor 0.95.

Photobiological safety class: exempt group.

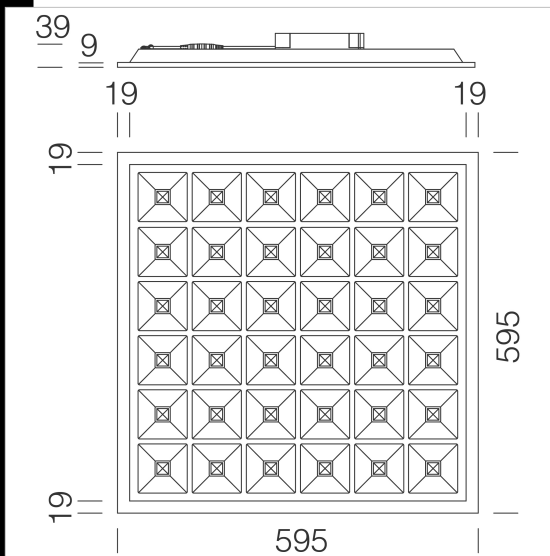

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150240-00	CLD	1,68	LED-3966lm-4000K-CRI 80	30 W	WHITE
150240-39	CLD	1,98	LED-3688lm-3000K-CRI 80	30 W	WHITE
150240-0041	CLD-D-D	1,74	LED-3966lm-4000K-CRI 80	30 W	WHITE
150240-3941	CLD-D-D	1,98	LED-3688lm-3000K-CRI 80	30 W	WHITE

#### Accessori



- 600 EM power kit



- 595 frame 600x600 h70mm



- 907 Springs



- 320 steel safety cord

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated