


## 874 Comfort T8 - high-gloss 99.99

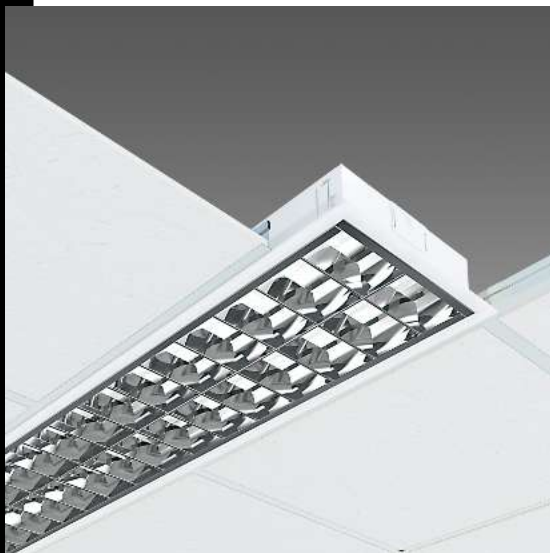

Housing: in steel sheet.


Louvre: Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.

Coating: acrylic anionic electrocoating, white, UV-stabilized Electric gear: automatic line and 100% tested on the line. 230V/50Hz (CNR) power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards. Quick connector +T with maximum allowed lead cross section of 2.5 sq mm.

Equipment: Snap fastening optics, which remain attached by safety cords. 6.3A protection fuse.

Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets, acc. 901 or acc. 898/899 for 1x36/58.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

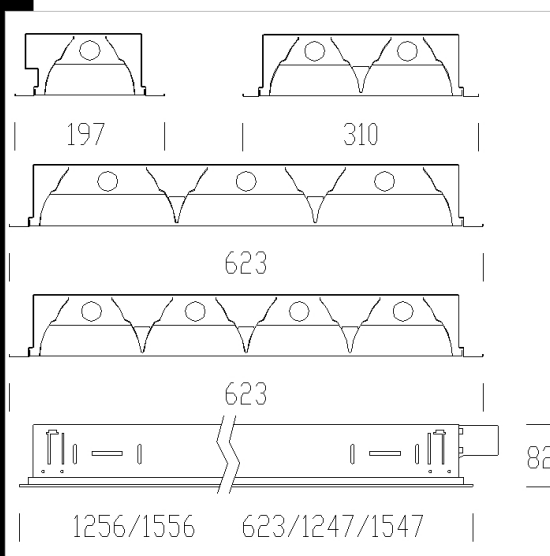

Code	Gear	Kg	Watt	Base	Lamps	Colour
151301-08	CEL-F	3,40	FL 1x36	G13	3350lm-4000K-Ra 1b	WHITE
150304-12	CELF-D	4,20	FL 2x36	G13	3350lm-4000K-Ra 1b	WHITE
151304-09	CELF-E	5,50	FL 2x36	G13	3350lm-4000K-Ra 1b	WHITE
151305-09	CELF-E	6,50	FL 2x58	G13	5200lm-4000K-Ra 1b	WHITE
151303-08	CEL-F	2,60	FL 2x18	G13	1350lm-4000K-Ra 1b	WHITE
151304-08	CEL-F	5,00	FL 2x36	G13	3350lm-4000K-Ra 1b	WHITE
151307-09	CELF-E	4,10	FL 4x18	G13	1350lm-4000K-Ra 1b	WHITE
151301-0041	CELF-D-D	3,08	FL 1x36	G13	3350lm-4000K-Ra 1b	WHITE
151305-0041	CELF-D-D	4,70	FL 2x58	G13	5200lm-4000K-Ra 1b	WHITE
151304-0041	CELF-D-D	4,04	FL 2x36	G13	3350lm-4000K-Ra 1b	WHITE
151307-08	CEL-F	3,61	FL 4x18	G13	1350lm-4000K-Ra 1b	WHITE
151301-09	CELF-E	3,90	FL 1x36	G13	3350lm-4000K-Ra 1b	WHITE
151302-09	CELF-E	5,00	FL 1x58	G13	5200lm-4000K-Ra 1b	WHITE
151302-12	CELF-D	4,50	FL 1x58	G13	5200lm-4000K-Ra 1b	WHITE
151303-12	CELF-D	2,60	FL 2x18	G13	1350lm-4000K-Ra 1b	WHITE
151305-12	CELF-D	5,00	FL 2x58	G13	5200lm-4000K-Ra 1b	WHITE
151307-12	CELF-D	3,67	FL 4x18	G13	1350lm-4000K-Ra 1b	WHITE
151306-09	CELF-E	5,00	FL 3x18	G13	1350lm-4000K-Ra 1b	WHITE
151301-12	CELF-D	3,10	FL 1x36	G13	3350lm-4000K-Ra 1b	WHITE
151302-08	CEL-F	4,50	FL 1x58	G13	5200lm-4000K-Ra 1b	WHITE
151306-12	CELF-D	4,50	FL 3x18	G13	1350lm-4000K-Ra 1b	WHITE
151305-08	CEL-F	6,00	FL 2x58	G13	5200lm-4000K-Ra 1b	WHITE
151302-0041	CELF-D-D	3,88	FL 1x58	G13	5200lm-4000K-Ra 1b	WHITE
151307-0041	CELF-D-D	3,75	FL 4x18	G13	1350lm-4000K-Ra 1b	WHITE
151306-0041	CELF-D-D	4,00	FL 3x18	G13	1350lm-4000K-Ra 1b	WHITE
151306-08	CEL-F	4,50	FL 3x18	G13	1350lm-4000K-Ra 1b	WHITE
151303-09	CELF-E	2,58	FL 2x18	G13	1350lm-4000K-Ra 1b	WHITE

**Accessories**

CEL-F  
 IP20  
 EM  
 DIMM  
 MAIN CONTROL SYSTEM  
 UGR <19  
 65°  
 IK07  
 CELF-E  
 EL

**Download**  
 DXF 2D  
 - 874.dxf  
 3DS  
 - 874\_2x36.3ds  
 3DM  
 - 874\_2x36.3dm  
 Montaggi  
 - comfort8.pdf

Accessories



- 203 Fuse



- 320 steel safety cord



- 898 adjustable bracket



- 901 adjustable bracket