

864 Comfortlight T5 - high-gloss 99.85



Housing: In rolled hot-dip galvanized steel,
Louvre: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-glare and anti-iridescence, very low luminance 65° 99.85.

Lampholder: In polycarbonate, with contacts in phosphor bronze.

Electric gear: Automatic line and are 100% tested on the line 230V/50Hz electronic power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Equipment: Quick connectors for electrical line and with door for electrical connections.

Snap fastening optics, which remain attached with nylon cords.

Anti-fingerprint gloves to avoid damage to the louvre during installation.

Mounting: Recessed for contact mounting on the cross T structure

Regulations: Produced according to applicable EN60598 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529. These products can be installed on normally inflammable surfaces.

Emergency light version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit continues to operate. Run time 60 minutes. On request: optional "Main Control System" available for emergency management.

THE NEW TL5 ECO MASTER LAMP HAS THE FOLLOWING ADVANTAGES:

Instant replacement of standard TL5 14W lamps.

10% energy saving.

Same luminous flux of Master TL5 14W lamps.

Good colour rendering (Ra>80).


Limited mercury levels: 1.4 mg.

INSTANT SAVING:

SAVING is possible

by replacing old ceiling light fixtures 60 x 60 with new luminaires equipped with

FL 3/4x14 MASTER TL5 HE ECO lamps!

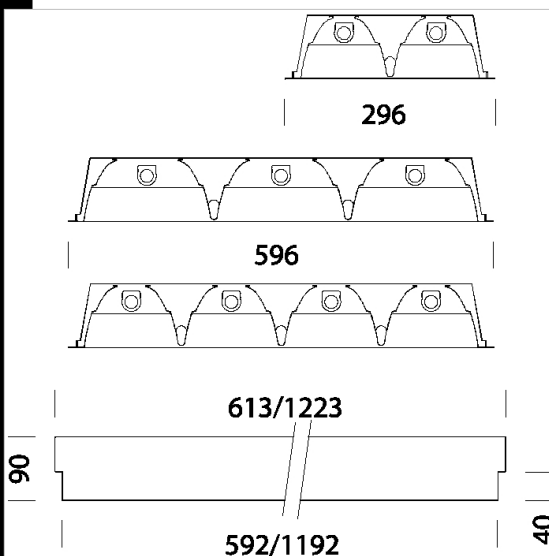

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
150416-00	CELL	3.82	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
150417-00	CELL	6.82	FL 4x28-2650lm-4000K-Ra 1b	128 W	G5	WHITE
150416-07	CELL-E	4.26	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	WHITE
150417-07	CELL-E	7.20	FL 4x28-2650lm-4000K-Ra 1b	132 W	G5	WHITE
150415-07	CNR-L	4.50	FL 2x28-2650lm-4000K-Ra 1b	68 W	G5	WHITE
150416-12	CELL-D	3.82	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
150417-12	CELL-D	6.82	FL 4x28-2650lm-4000K-Ra 1b	128 W	G5	WHITE
150426-12	CELL-D	3.00	FL 3x14-1250lm-4000K-Ra 1b	50 W	G5	WHITE
150426-07	CELL-E	5.50	FL 3x14-1250lm-4000K-Ra 1b	54 W	G5	WHITE
150415-12	CELL-D	3.15	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
150415-00	CELL	4.15	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
150426-00	CELL	7.00	FL 3x14-1250lm-4000K-Ra 1b	51 W	G5	WHITE
150414-12	CNR-L	1.80	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	WHITE
150414-00	CELL	1.80	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	WHITE

Accessories



- 203 Fuse



- 320 steel safety cord



Download

DXF 2D

- 864.dxf

3DS

- 864_2x28.3ds

3DM

- 864_2x28.3dm

Montaggi

- esempio comfort_2.dxf

- comfort depl_2.dxf

- portafusibile.dxf

- esempio comfort_1.dxf

- comfort depl_3.dxf

- esempio comfort_3.dxf

- 864dimensione plafoniere.dxf

- comfort depl_4.dxf

- comfort depl_5.dxf

- comfort depl1.dxf

- comfortlight.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated