



## 864 Comfortlight T8 - high-gloss 99.85

Housing: In rolled hot-dip galvanized steel,  
Louvre: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-glare and anti-iridescence, very low luminance 65° 99.85.


Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.  
Electric gear: Automatic line and are 100% tested on the line 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Equipment: Quick connectors for electrical line and with door for electrical connections.

Snap fastening optics, which remain attached with nylon cords.  
Anti-fingerprint gloves to avoid damage to the louvre during installation.

Mounting: Recessed for contact mounting on the cross T structure  
Regulations: Produced according to applicable EN60598 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529. These products can be installed on normally inflammable surfaces.

Emergency light version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit continues to operate. Run time 60 minutes. On request: optional "Main Control System" available for emergency management.

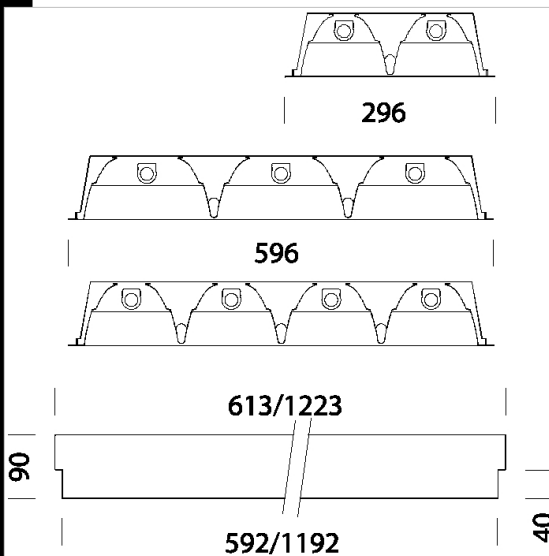

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
150420-08	CELL	3.50	FL 4x18-1350lm-4000K-Ra 1b	75 W	G13	WHITE
150418-08	CELL	1.68	FL 2x18-1350lm-4000K-Ra 1b	43 W	G13	WHITE
150420-09	CELL-E	4.38	FL 4x18-1350lm-4000K-Ra 1b	78 W	G13	WHITE
150419-08	CELL	4.00	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
150421-09	CELL-E	8.50	FL 4x36-3350lm-4000K-Ra 1b	149 W	G13	WHITE
150419-09	CELL-E	4.50	FL 2x36-3350lm-4000K-Ra 1b	76 W	G13	WHITE
150423-09	CELL-E	6.10	FL 3x18-1350lm-4000K-Ra 1b	60 W	G13	WHITE
150420-12	CELL-D	3.50	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
150421-08	CELL	8.00	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
150423-08	CELL	5.10	FL 3x18-1350lm-4000K-Ra 1b	57 W	G13	WHITE

### Accessories



- 203 Fuse



- 320 steel safety cord



### Download

- DXF 2D  
- 864.dxf
- 3DS  
- 864\_2x28.3ds
- 3DM  
- 864\_2x28.3dm

### Montaggi

- esempio comfort\_2.dxf
- comfort depl\_2.dxf
- portafusibile.dxf
- esempio comfort\_1.dxf
- comfort depl\_3.dxf
- esempio comfort\_3.dxf
- comfort depl\_4.dxf
- comfort depl\_5.dxf
- comfort depl\_1.dxf
- comfortlight.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated