


860 Comfortlight T8 - matt 99.85



Housing: In rolled hot-dip galvanized steel,  
Louvre: double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-glare and anti-iridescence, very low luminance 99.85.  
Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.  
Electric gear: Automatic line and are 100% tested on the line 230V/50Hz electronic power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.  
Equipment: Quick connectors for electrical line and with door for electrical connections.  
Snap fastening optics, which remain attached with nylon cords.  
Anti-fingerprint gloves to avoid damage to the louvre during installation.  
Mounting: Recessed for contact mounting on the cross T structure  
Regulations: Produced according to applicable EN60598 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529. These products can be installed on normally inflammable surfaces.

-   CNRL
-  CNRL-E  CELL 
-   IP20
-  U.V.  EM 
-   
-  DIMM  MAIN CONTROL SYSTEM
-  IK07  UGR<19
-  S  65°

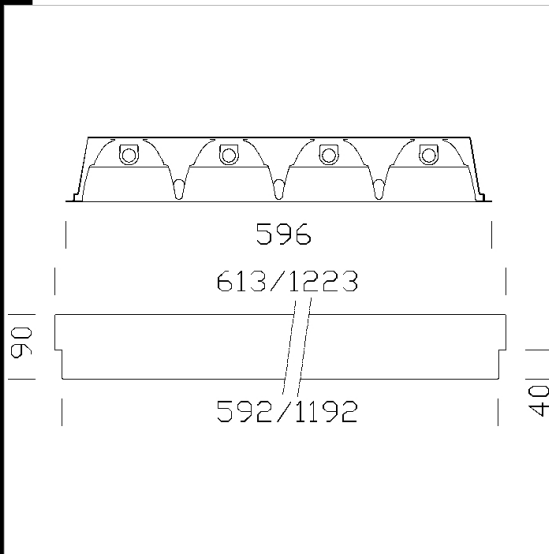

**Download**  
DXF 2D  
- 860.dxf  
Montaggi  
- comfortlight.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
150441-09	CELL-E	4.20	FL 4x18-1350lm-4000K-Ra 1b	78 W	G13	WHITE
150442-08	CELL	8.31	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
150441-12	CELL-D	3.24	FL 4x18-1350lm-4000K-Ra 1b	72 W	G13	WHITE
150442-09	CELL-E	8.31	FL 4x36-3350lm-4000K-Ra 1b	142 W	G13	WHITE
150441-08	CELL	3.90	FL 4x18-1350lm-4000K-Ra 1b	75 W	G13	WHITE

Accessories



- 203 Fuse



- 320 steel safety cord

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated