




Download

DXF 2D  
- 861led.dxf

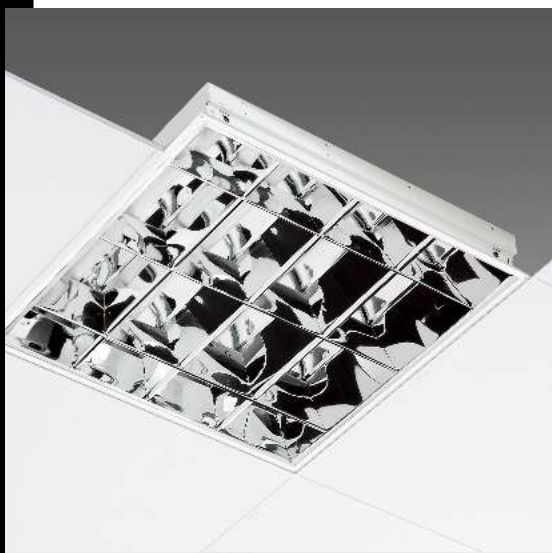

## 861 Comfortlight - LED

Housing: in galvanised steel sheet panels, pre-coated with polyester resin. Louvre: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-glare and anti-iridescence, very low luminance 65° 99.85. Equipment: hinged door and quick clamping mechanism. Supplied with a protective film to prevent the fixtures from accumulating dirt and to keep the optics clear and ensure perfect performance. 2A protection fuse. Mounting: Recessed for contact mounting on the cross T structure max. 38mm.

LED characteristics: • Glass tube with G13 connector. • Ambient temperature: -10°C to + 40°C. • High number of on/off cycles (about 200.000). • Eco-friendly: no U.V. and I.R. emissions. LED 2800lm - 4000K - CRI 80 - UGR>19 - 25000h

LED 3000lm - 6500K - CRI 80 - UGR>19 - 25000h

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.



Code	Gear	Kg	Watt	Base	Lamps	Colour
150457-00	CLD CELL	3,10	LED 4X		2800lm-4000K-CRI 80	WHITE
150458-00	CLD CELL	3,08	LED 4X		3000lm-6500K-CRI 80	WHITE