



864 Comfortlight - UGR<16

Housing: in galvanised steel sheet panels, pre-coated with polyester resin. Louvre: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-glare and anti-iridescence, very low luminance 65° 99.85. Equipment: hinged door and quick clamping mechanism. Supplied with a protective film to prevent the fixtures from accumulating dirt and to keep the optics clear and ensure perfect performance. Mounting: Recessed for contact mounting on the cross T structure max. 38mm. Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. Luminous flux maintenance 70% 80000h (L70B20) - UGR<16 Power factor 0,95






















Download

DXF 2D
- 864led.dxf
Montaggi
- comfortlight_09-20.pdf

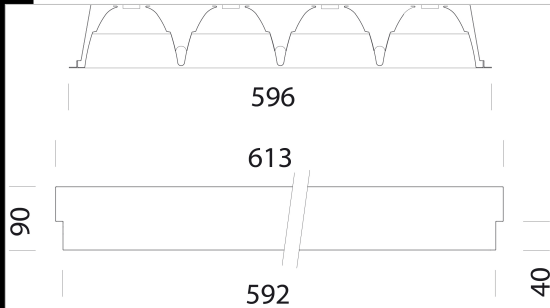

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150460-00	CLD	3.10	LED-3620lm-4000K-CRI>80	37 W	WHITE

Accessories



- 320 steel safety cord

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated