



875 Comfort T5 - matt 99.99

Housing: in steel sheet.

Louvre: Dark light double parabolic louvres, in matt aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.

Coating: acrylic anionic electrocoating, white, UV-stabilized

Electric gear: automatic line and 100% tested on the line. 230V/50Hz (CNR) power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards. Quick connector +T with maximum allowed lead cross section of 2.5 sq mm.

Equipment: Snap fastening optics, which remain attached by safety cords. 6.3A protection fuse for the 873 and 875 versions.


Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets, acc. 901.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Download

DXF 2D
- 873_75_77.dxf

Montaggi
- comfot8.pdf

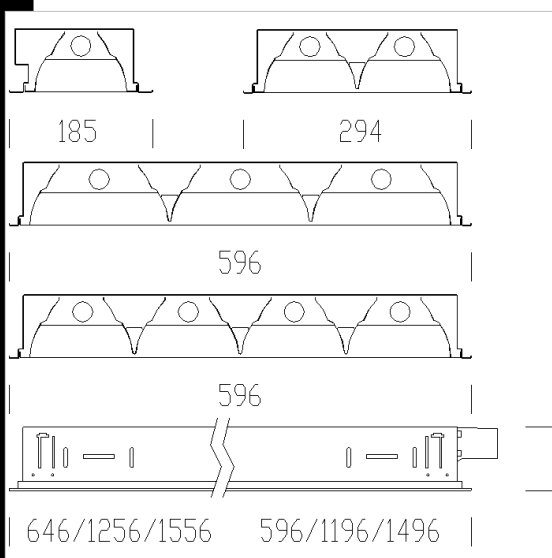

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
151120-09	CELLF-E	3.63	FL 1x28-2650lm-4000K-Ra 1b	34 W	G5	BIANCO
151121-09	CELLF-E	4.60	FL 1x35-3350lm-4000K-Ra 1b	42 W	G5	BIANCO
151125-00	CELL-F	4.90	FL 2x35-3350lm-4000K-Ra 1b	75 W	G5	BIANCO
151131-00	CELL-F	6.58	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	BIANCO
151123-00	CELL-F	2.23	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	BIANCO
151130-00	CELL-F	3.46	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	BIANCO
151122-09	CELLF-E	4.60	FL 1x49-4350lm-4000K-Ra 1b	59 W	G5	BIANCO
151127-00	CELL-F	3.90	FL 3x14-1250lm-4000K-Ra 1b	51 W	G5	BIANCO
151124-00	CELL-F	4.10	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	BIANCO
151128-00	CELL-F	6.00	FL 3x28-2650lm-4000K-Ra 1b	88 W	G5	BIANCO
151126-00	CELL-F	4.90	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	BIANCO
151123-09	CELLF-E	2.57	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	BIANCO
151127-09	CELLF-E	3.98	FL 3x14-1250lm-4000K-Ra 1b	54 W	G5	BIANCO
151130-09	CELLF-E	4.06	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	BIANCO
151124-09	CELLF-E	4.37	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	BIANCO
151128-09	CELLF-E	6.60	FL 3x28-2650lm-4000K-Ra 1b	92 W	G5	BIANCO
151120-00	CELL-F	3.40	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	BIANCO
151121-00	CELL-F	4.20	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	BIANCO
151122-00	CELL-F	4.20	FL 1x49-4350lm-4000K-Ra 1b	55 W	G5	BIANCO
151125-09	CELLF-E	5.50	FL 2x35-3350lm-4000K-Ra 1b	79 W	G5	BIANCO
151131-09	CELLF-E	7.20	FL 4x28-2650lm-4000K-Ra 1b	124 W	G5	BIANCO
151126-09	CELLF-E	5.50	FL 2x49-4350lm-4000K-Ra 1b	109 W	G5	BIANCO

Accessories



- 203 Fuse



- 320 steel safety cord



- 898 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated