


## 814 Comfort - prismatic diffuser

Housing: In sheet steel.  
 Diffuser: In prismatic, antidazzle, injection moulded, plexiglass.  
 Painting: By acrylic anionic electrocoating, white, UV-stabilized, anti-yellowing, upon phosphate treatment.  
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.  
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.  
 Mounting: In module 600 panels.  
 Equipment: Safety spring to prevent diffuser from falling.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.  
 Additional gear: Electronic ballast.

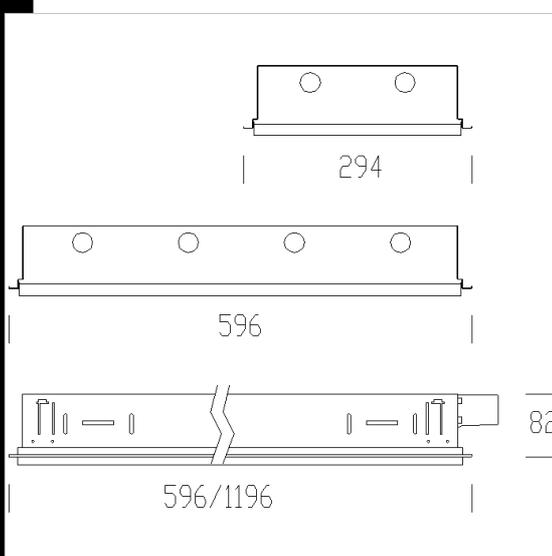

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
152045-08	CEL	2,59	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
152046-08	CEL	5,01	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
152046-09	CEL-E	4,90	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
152047-08	CEL	4,09	FL 4x18-1350lm-4000K-Ra 1b	75 W	G13	WHITE

### Accessori



- 901 adjustable bracket



### Download

- DXF 2D  
- 814.dxf
- 3DS  
- 825\_2x36.3ds
- 3DM  
- 825\_2x36.3dm
- Montaggi  
- 811\_4.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated