


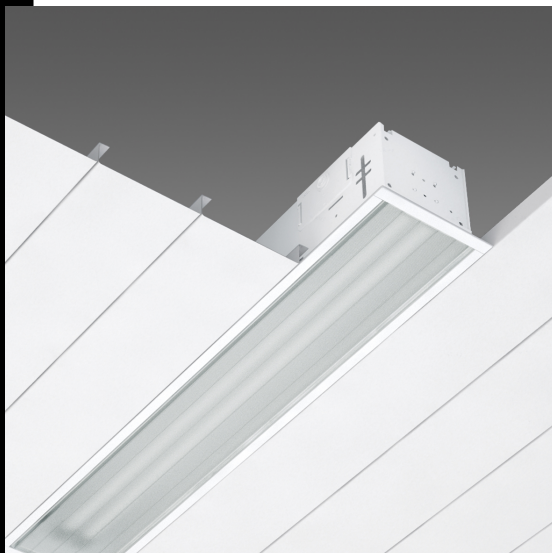

848 Supercomfort T5 - with diffuser

Housing: In sheet steel

Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate, with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply with electronic ballast for T5 lamps. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.

2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20/40IK03 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces. They are provided with ENEC European certification.

Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets, acc. 898.


Download

DXF 2D

- 848.dxf

Montaggi

- supercomfort-t5.pdf
- supercomfort 220 mont.dxf
- supercomfort 224 mont.dxf
- supercomfort fila cont.dxf
- supercomfort staffa.dxf

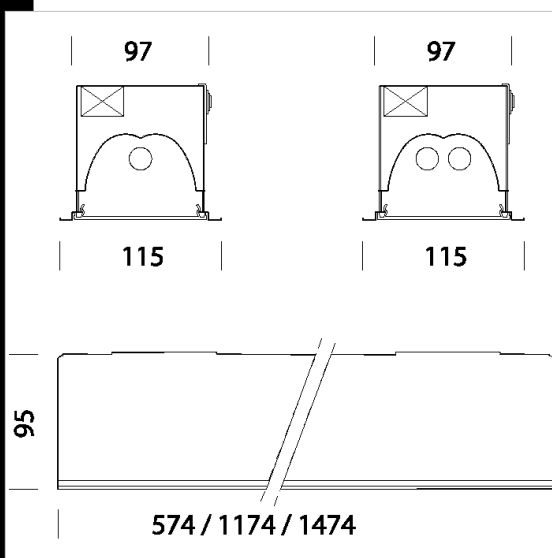

Code	Gear	Kg	Watt	Base	Lamps	Colour
152410-00	CELL-F	0,00	FL 1x14	G5	1250lm-4000K-Ra 1b	-
153410-12	CELLF-D	1,15	FL 1x14	G5	1250lm-4000K-Ra 1b	WHITE
153411-12	CELLF-D	3,16	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
153412-12	CELLF-D	3,78	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
153413-12	CELLF-D	1,60	FL 2x14	G5	1250lm-4000K-Ra 1b	WHITE
153414-12	CELLF-D	2,50	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
153415-12	CELLF-D	4,18	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
153410-09	CELLF-E	2,91	FL 1x14	G5	1250lm-4000K-Ra 1b	WHITE
153411-00	CELL-F	3,56	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
153411-09	CELLF-E	3,76	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
153412-00	CELL-F	5,08	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
153412-09	CELLF-E	4,52	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
153413-00	CELL-F	2,81	FL 2x14	G5	1250lm-4000K-Ra 1b	WHITE
153413-09	CELLF-E	2,19	FL 2x14	G5	1250lm-4000K-Ra 1b	WHITE
153414-00	CELL-F	3,56	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
153414-09	CELLF-E	4,06	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
153415-00	CELL-F	5,08	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
153415-09	CELLF-E	4,66	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE

Accessories



- 200 for solid line



- 224 End cap