



Download


DXF 2D
- 808v.dxf

Montaggi
- gabbiano 09-20.pdf



808 Gabbiano

Housing: made of sheet steel. Reflector: white aluminium. Diffuser: semi-sphere in micro-perforated sheet metal. Supplied without brackets: when not contact mounted, use brackets acc. 900. Luminous flux maintenance 80% 50.000h (L80B20) Photobiological safety class: exempt group.

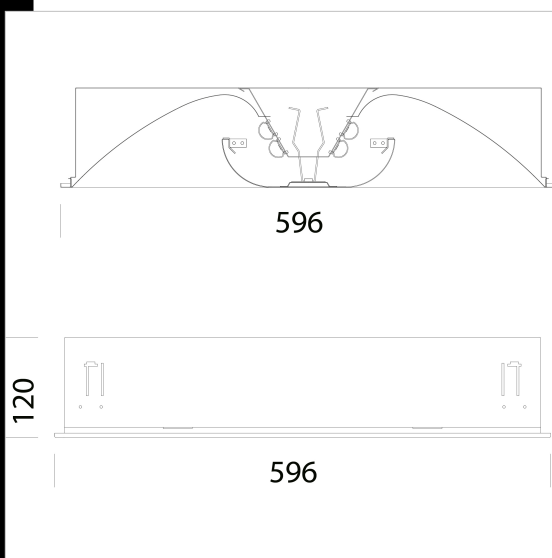

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
153025-00	CLD	5,63	LED-2975lm-4000K-CRI>80	55 W	WHITE

Accessori



- 900 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated