



#### Download

DXF 2D  
- d8056.dxf

3DS  
- 805\_airone\_2x55.3ds

3DM  
- 805\_airone\_2x55.3dm

Montaggi  
- 705-805-6\_airone.pdf



#### 805 Airone

Housing: In sheet steel.

Reflector: in matt, anti-dazzle, low luminance white aluminium.

Diffuser: with micropunched steel diffuser complete with anti-dazzle plexiglass opal diffuser.

Painting: The housing and the reflector are painted white by acrylic anionic electrocoating, anti-yellowing.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Sockets 2G11.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.


Equipment: 6.3 A fuse. Complete with 4 adjustable steel brackets.

Mounting: Recessed.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.

Lamp: Complete with energy saving lamp. FLC2x55L.

Dimming electronics: on specific request by the customer.

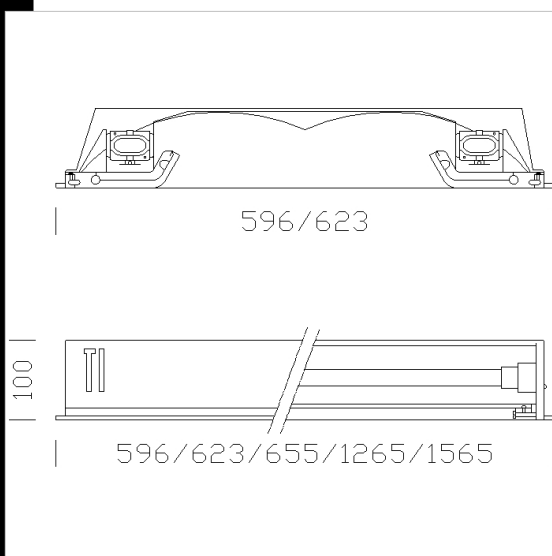

Code	Gear	Kg	Watt	Base	Lamps	Colour
153112-09	CELLF-E	7,50	FLC 2x55L	2G11	4800lm-4000K-Ra 1b	WHITE
153112-00	CELL-F	7,00	FLC 2x55L	2G11	4800lm-4000K-Ra 1b	WHITE