


848 Supercomfort T5 - with diffuser

Housing: In sheet steel
 Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.
 Lampholder: In polycarbonate, with phosphor bronze contacts.
 Electric gear: 230V/50Hz power supply with electronic ballast for T5 lamps.
 Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.
 2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20/40IK03 degree of protection according to EN 60529 standards.
 This product can be installed on normally inflammable surfaces. They are provided with ENEC European certification.
 Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets, acc. 898.

Download

- DXF 2D
- 848.dxf
- Montaggi
- supercomfort staffa.dxf
- supercomfort 220 mont.dxf
- supercomfort 224 mont.dxf
- supercomfort fila cont.dxf
- supercomfort-t5.pdf

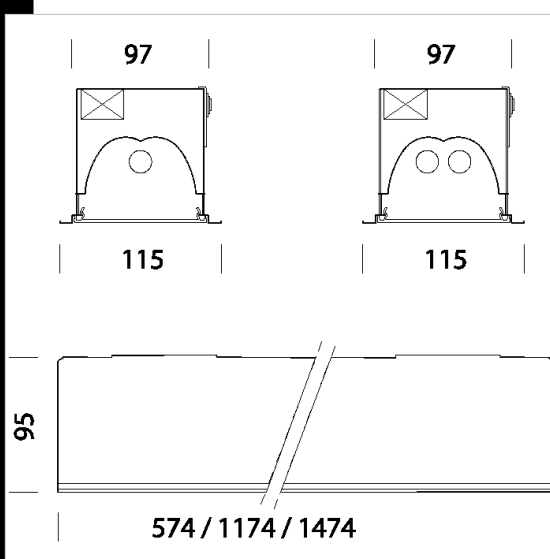

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
153411-00	CELL-F	3.56	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
153411-09	CELLF-E	3.76	FL 1x28-2650lm-4000K-Ra 1b	34 W	G5	WHITE
153412-00	CELL-F	5.08	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE
153414-00	CELL-F	3.56	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
153414-09	CELLF-E	4.06	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
153415-00	CELL-F	5.08	FL 2x35-3350lm-4000K-Ra 1b	75 W	G5	WHITE
153411-12	CELLF-D	3.16	FL 1x28-2650lm-4000K-Ra 1b	32 W	G5	WHITE
153413-09	CELLF-E	2.19	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	WHITE
153413-12	CELLF-D	1.60	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
153410-12	CELLF-D	1.15	FL 1x14-1250lm-4000K-Ra 1b	15 W	G5	WHITE
153412-12	CELLF-D	3.78	FL 1x35-3350lm-4000K-Ra 1b	39 W	G5	WHITE
153415-12	CELLF-D	4.18	FL 2x35-3350lm-4000K-Ra 1b	78 W	G5	WHITE
153415-09	CELLF-E	4.66	FL 2x35-3350lm-4000K-Ra 1b	79 W	G5	WHITE
153413-00	CELL-F	2.81	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
153410-09	CELLF-E	2.91	FL 1x14-1250lm-4000K-Ra 1b	18 W	G5	WHITE
153412-09	CELLF-E	4.52	FL 1x35-3350lm-4000K-Ra 1b	42 W	G5	WHITE
153414-12	CELLF-D	2.50	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE

Accessories



- 200 for solid line



- 224 End cap

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated