




Download

DXF 2D
- 849.dxf

Montaggi

- supercomfort staffa.dxf
- supercomfort 220 mont.dxf
- supercomfort 224 mont.dxf
- supercomfort fila cont.dxf
- supercomfort-t5.pdf

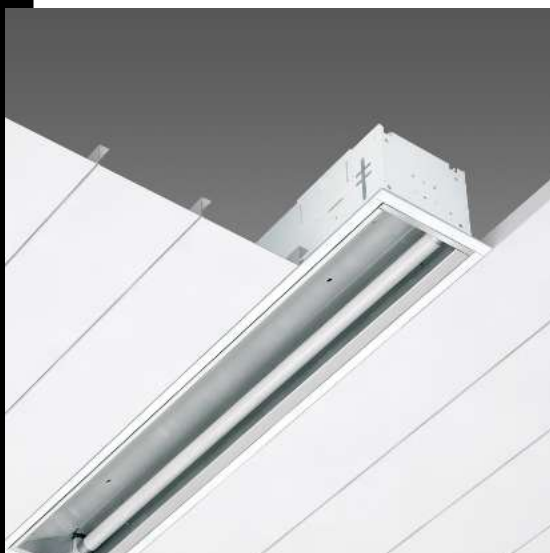

849 Supercomfort - asymmetric

Housing: In sheet steel

Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.


Lampholder: In polycarbonate, with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply with electronic ballast for T5 lamps. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards. 2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces. They are provided with ENEC European certification.

Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets, acc. 898.

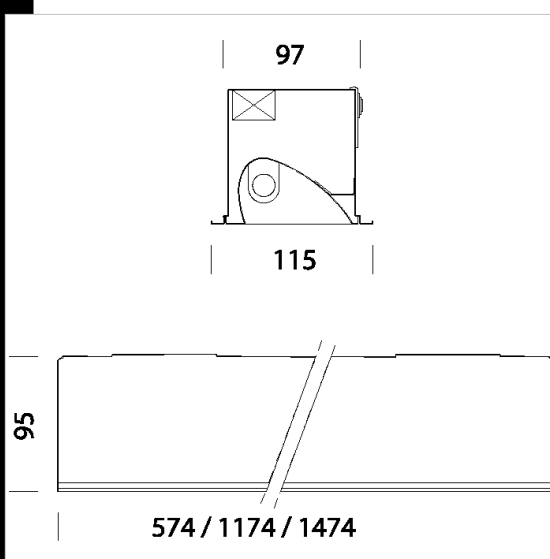

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
153422-12	CELLF-D	3.08	FL 1x35-3350lm-4000K-Ra 1b	39 W	G5	WHITE
153421-00	CELL-F	2.56	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
153421-09	CELLF-E	3.06	FL 1x28-2650lm-4000K-Ra 1b	34 W	G5	WHITE
153420-09	CELLF-E	1.79	FL 1x14-1250lm-4000K-Ra 1b	18 W	G5	WHITE
153420-12	CELLF-D	1.20	FL 1x14-1250lm-4000K-Ra 1b	15 W	G5	WHITE
153422-09	CELLF-E	3.76	FL 1x35-3350lm-4000K-Ra 1b	42 W	G5	WHITE
153420-00	CELL-F	2.41	FL 1x14-1250lm-4000K-Ra 1b	15 W	G5	WHITE
153421-12	CELLF-D	2.10	FL 1x28-2650lm-4000K-Ra 1b	32 W	G5	WHITE
153422-00	CELL-F	3.88	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE

Accessories



- 200 for solid line



- 224 End cap

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated