
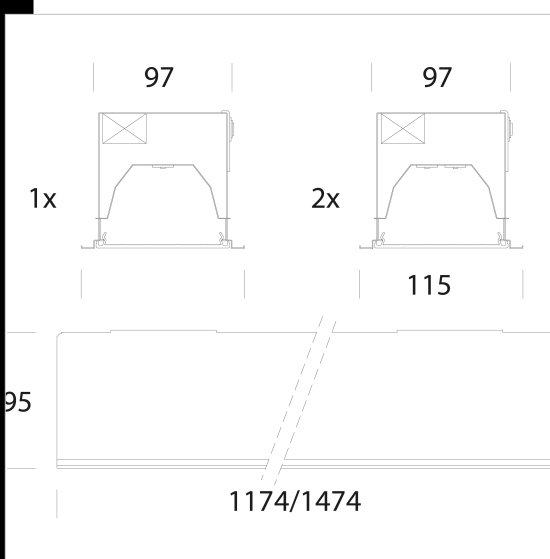


848 Supercomfort

Housing: in steel sheet. Diffuser: in shatterproof and self-extinguishing V2 polycarbonate. Painting: acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment. Supplied without mounting brackets for contact mounting on the cross T structure. For non-contact mounting, please order brackets acc. 898/899. LED: Power factor 0.9. Luminous flux maintenance 80%: 50.000h (L80B20). Photobiological safety class: Exempt group.

Versions

L1174mm - 24W - 4000lm - 4000K - CRI>80
 L1474mm - 30W - 5000lm - 4000K - CRI>80
 L1174mm - 48W - 8000lm - 4000K - CRI>80
 L1474mm - 60W - 10000lm - 4000K - CRI>80

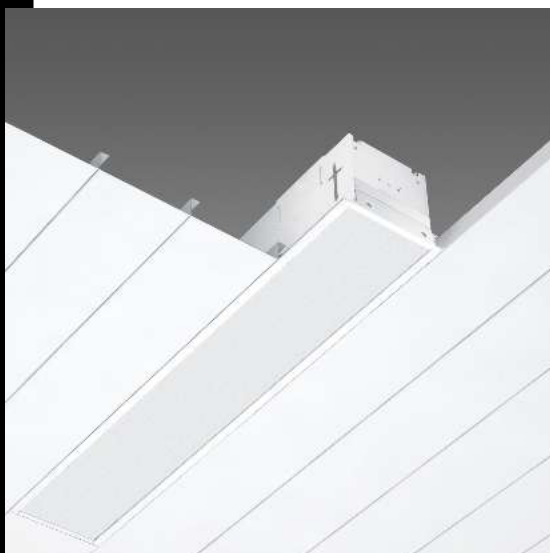

Code	Gear	Kg	Watt	Base	Lamps	Colour
153431-00	CLD CELL	3,56	LED white 24W		4000lm-4000K-CRI 80	WHITE
153432-00	CLD CELL	5,08	LED white 30W		5000lm-4000K-CRI 80	WHITE
153434-00	CLD CELL	3,56	LED white 48W		8000lm-4000K-CRI 80	WHITE
153435-00	CLD CELL	5,08	LED white 60W		10000lm-4000K-CRI 80	WHITE

Accessori



- 200 for solid line




- 898 adjustable bracket



- 224 End cap



- 899 bracket



Download

DXF 2D
- 848s.dxf