



Download

DXF 2D
- 848n.dxf
Montaggi
- 848.pdf

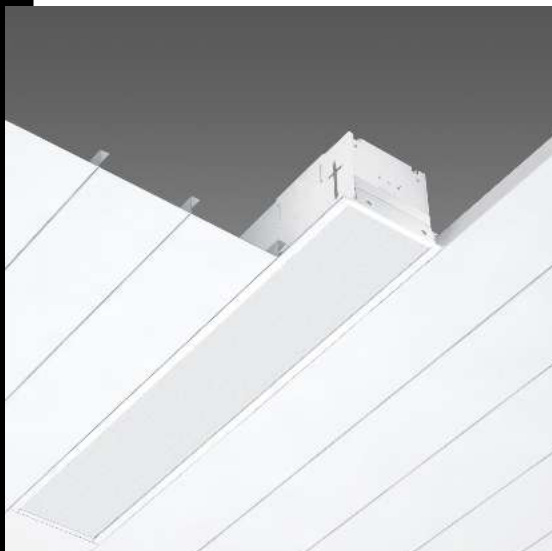

848 Supercomfort

Housing: in steel sheet. Diffuser: in shatterproof and self-extinguishing V2 polycarbonate. Painting: acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment. Supplied without mounting brackets for contact mounting on the cross T structure. For non-contact mounting, please order brackets acc. 898/899. LED: Power factor 0.9. Luminous flux maintenance 80%: 50.000h (L80B20). Photobiological safety class: Exempt group.

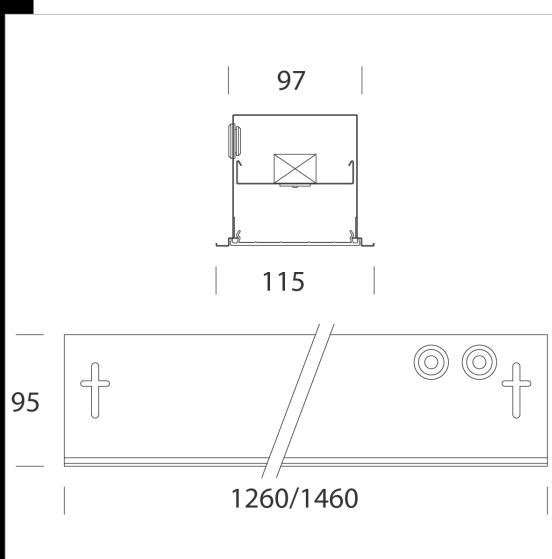

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
153436-00	CLD	3,55	LED-2598lm-4000K-CRI80	26 W	WHITE
153437-00	CLD	3,51	LED-4855lm-4000K-CRI80	48 W	WHITE
153438-00	CLD	4,52	LED-7073lm-4000K-CRI80	72 W	WHITE

Accessori



- 200 for solid line



- 898 adjustable bracket



- 224 End cap



- 899 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated