

850 Minicomfort T5 high-gloss 99.99

Housing: galvanized steel stove pre-enamelling.
Louvre: Dark light Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.

Lampholder: In polycarbonate, with contacts in phosphor bronze.
Electric gear: Automatic line and are 100% tested on the line 230V/50Hz electronic power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Equipment: Quick connectors for electrical line and with door for electrical connections.

Snap fastening optics, which remain attached with nylon cords.
Anti-fingerprint gloves to avoid damage to the louvre during installation.

Mounting: Recessed for contact mounting on the cross T structure
Regulations: Produced according to applicable EN60598 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529. These products can be installed on normally inflammable surfaces.

Emergency light version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit continues to operate. Run time 60 minutes. On request: optional "Main Control System" available for emergency management.

Minimum size of hole for recessed installation:

Mini Comfort 4x14/3x14/2x14(600x600) = 572x572mm

Mini Comfort 2x14 = 572x270mm


Mini Comfort 4x28/3x28 = 1172x572mm

Mini Comfort 2x28 = 1172x270mm

Download

DXF 2D
- 850.dxf

Montaggi
- 320 mont.dxf
- Minicomfort.pdf
- 326 mont.dxf

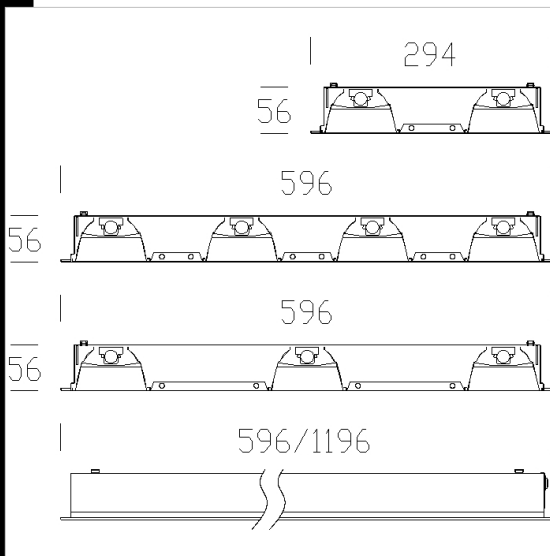

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
153504-00	CELL	4,30	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
153506-07	CELL-E	8,50	FL 4x28-2650lm-4000K-Ra 1b	132 W	G5	WHITE
153506-00	CELL	7,80	FL 4x28-2650lm-4000K-Ra 1b	128 W	G5	WHITE
153503-00	CELL	3,91	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
153505-07	CELL-E	8,30	FL 3x28-2650lm-4000K-Ra 1b	104 W	G5	WHITE
153505-00	CELL	7,80	FL 3x28-2650lm-4000K-Ra 1b	100 W	G5	WHITE
153501-51	CELL-DH	3,20	FL 3x14-1250lm-4000K-Ra 1b	48 W	G5	WHITE
153503-0041	CELL-D-D	3,00	FL 4x14-1250lm-4000K-Ra 1b	62 W	G5	WHITE
153504-51	CELL-DH	3,30	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
153506-51	CELL-DH	7,80	FL 4x28-2650lm-4000K-Ra 1b	128 W	G5	WHITE
153501-00	CELL	3,20	FL 2x14-1250lm-4000K-Ra 1b	51 W	G5	WHITE
153501-07	CELL-E	3,80	FL 3x14-1250lm-4000K-Ra 1b	54 W	G5	WHITE
153500-51	CELL-DH	2,60	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
153506-0041	CELL-D-D	7,80	FL 4x28-2650lm-4000K-Ra 1b	124 W	G5	WHITE
153505-0041	CELL-D-D	7,20	FL 3x28-2650lm-4000K-Ra 1b	92 W	G5	WHITE
153503-51	CELL-DH	3,90	FL 4x14-1250lm-4000K-Ra 1b	62 W	G5	WHITE
153501-0041	CELL-D-D	3,20	FL 3x14-1250lm-4000K-Ra 1b	47 W	G5	WHITE
153505-51	CELL-DH	7,80	FL 3x28-2650lm-4000K-Ra 1b	95 W	G5	WHITE
153504-0041	CELL-D-D	3,37	FL 2x28-2650lm-4000K-Ra 1b	62 W	G5	WHITE
153500-0041	CELL-D-D	2,60	FL 2x14-1250lm-4000K-Ra 1b	32 W	G5	WHITE
153503-07	CELL-E	4,40	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	WHITE
153504-07	CELL-E	4,90	FL 2x28-2650lm-4000K-Ra 1b	68 W	G5	WHITE
153500-00	CELL	2,60	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	WHITE

Accessori



- 203 Fuse



- 320 steel safety cord



- 326 Stirrup

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated