


852 Supercomfort T5 - high gloss louvre 99.99

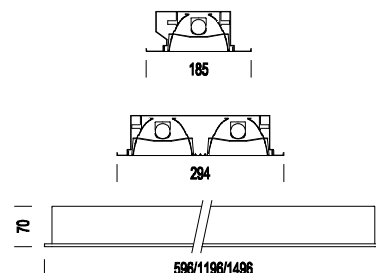

Code	Gear	Kg	Colour	Dimensions	lamp
153521-00	CELL-F	1.50	white		FL 2x14-G5-1250lm-4000K-Ra 1b
153522-00	CELL-F	2.30	white		FL 4x14-G5-1250lm-4000K-Ra 1b
153523-00	CELL-F	4.80	white	1196x185x70	FL 1x28-G5-2650lm-4000K-Ra 1b
153524-00	CELL-F	3.20	white	1196x294x70	FL 2x28-G5-2650lm-4000K-Ra 1b
153525-00	CELL-F	5.00	white	1196x596x70	FL 4x28-G5-2650lm-4000K-Ra 1b
153526-00	CELL-F	3.20	white	1496x185x70	FL 1x35-G5-3350lm-4000K-Ra 1b
153527-00	CELL-F	5.00	white	1496x294x70	FL 2x35-G5-3350lm-4000K-Ra 1b
153522-07	CELLF-E	3.40	white	596x596x70	FL 4x14-G5-1250lm-4000K-Ra 1b
153524-07	CELLF-E	4.30	white	1196x294x70	FL 2x28-G5-2650lm-4000K-Ra 1b
153525-07	CELLF-E	6.10	white	1196x294x70	FL 4x28-G5-2650lm-4000K-Ra 1b
153527-07	CELLF-E	6.10	white	1496x294x70	FL 2x35-G5-3350lm-4000K-Ra 1b

Housing: In sheet steel

Optics: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-dazzle and anti-iridescence, very low luminance 60°.

Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate, with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply with electronic ballast for T5 lamps. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.

2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.

Standard supply: Snap fastening optics, which remain attached by nylon safety cords.

Equipment: 3.15A protection fuse. Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use acc. 128 brackets; complete with protective film on the louvre and 1.5 m. cable.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK08 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces. They are provided with ENEC European certification.

Lamps: Complete with T5 (16mm) , high luminous efficiency, energy saving. HO - Philips or FQ - Osram lamps for high luminous fluxes can be installed on request.

Additional electric gear: emergency light unit for versions with T5 lamps.

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on (maintained version), thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.