

823 Comfort - high gloss louvre 99.99



Housing: In sheet steel

Optics: Dark light double parabolic louvres, lengthwise and crosswise in high-gloss, plated aluminium, anti-dazzle and anti-iridescence, very low luminance.

Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate, with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.


2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.

Standard supply: Snap fastening optics, which remain attached by nylon safety cords.

Equipment: 3.15A protection fuse. Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use acc. 128 brackets.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces.

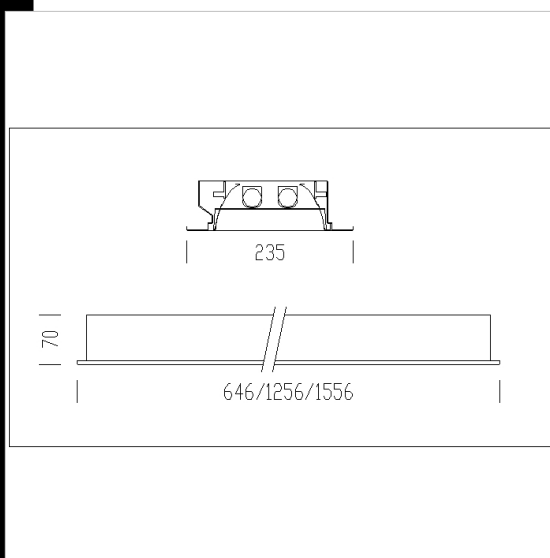

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
153531-08	CEL-F	5.00	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
153530-08	CEL-F	2.80	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
153532-08	CEL-F	7.00	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE



Download

DXF 2D

- 823_4.dxf

3DS

- 823_2x36.3ds

3DM

- 823_2x36.3dm

Montaggi

- 823_4_comfort.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated