


824 Comfort - matt louvre 99.99



Housing: In sheet steel
 Optics: Double parabolic louvres, lengthwise and crosswise in 2μ thick, matt anodized aluminium, low luminance.
 Painting: Acrylic anionic electrocoating, white, UV stabilised, upon phosphate treatment.
 Lampholder: In polycarbonate, with phosphor bronze contacts.
 Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.
 2P+T terminal block with fuseholder, maximum allowed lead cross-section of 2.5 sqmm.
 Standard supply: Snap fastening optics, which remain attached with nylon safety cords.
 Equipment: 3.15A protection fuse. Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use acc. 128 brackets.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK07 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.

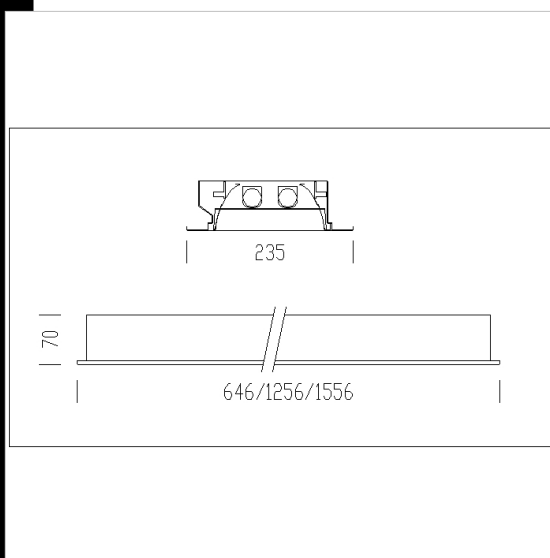

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
153630-08	CEL-F	3.20	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
153632-08	CEL-F	7.00	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
153631-08	CEL-F	5.00	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE



Download

- DXF 2D
- 823_4.dxf
- 3DS
- 823_2x36.3ds
- 3DM
- 823_2x36.3dm
- Montaggi
- 823_4_comfort.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated