




Download

DXF 2D
- 784.dxf



781 Compact

Housing: in sheet steel.
Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.
Equipment: Finish ring with safety springs.
Mounting: Ceiling.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards.
This product can be installed on normally inflammable surfaces.
LED: Luminous flux maintenance 70% 50.000h (L70B50). Power factor >0,9

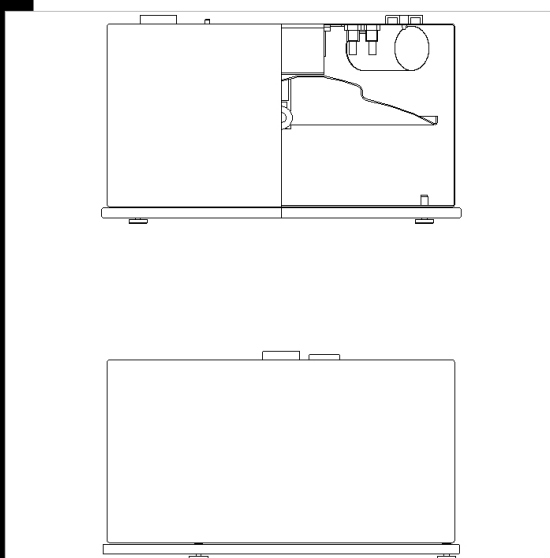

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
156301-00	CLD	2,48	LED-1262lm-4000K-CRI80	14 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated