



Download


DXF 2D
- 784.dxf

Montaggi
- MASTER_SLAVE.pdf



781 Compact - with sensor

Housing: in sheet steel.
Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.
Equipment: Finish ring with safety springs.
Mounting: Ceiling.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.
LED: Luminous flux maintenance 70% 50.000h (L70B50). Power factor >0,9
-19 (radar sensor)
-0024 (master)
-0096 (slave)

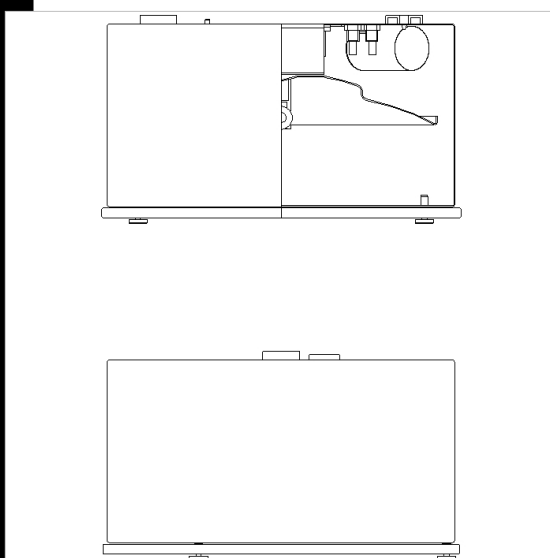

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
156301-19	CLD-D	2,69	LED-1262lm-4000K-CRI 80	20 W	WHITE
156301-0024	CLD	2,66	LED-1262lm-4000K-CRI 80	20 W	WHITE
156301-0096	CLD	2,56	LED-1262lm-4000K-CRI 80	20 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated