


Download
DXF 2D
- d782.dxf
Montaggi
- compact.pdf



782 Compact - cat. 3

Housing: in sheet steel.
Reflector: In vandal-resistant, V2 self-extinguishing polycarbonate, metallized with a C.V.D. high vacuum process using high grade aluminium powders, for better light control and luminous efficiency.
Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.
Lampholder: In polycarbonate with phosphor bronze contacts. Sockets G24d-3; G24q-3.
Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards, 2P + T terminal block in polycarbonate with maximum allowed lead cross section of 2.5 sqmm.
Equipment: Finish ring with safety springs.
Mounting: Ceiling.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards.
This product can be installed on normally inflammable surfaces.

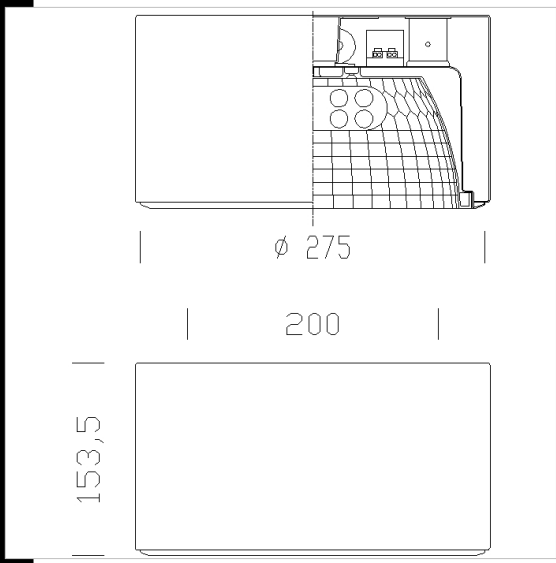

Code	Kg	WTot	Colour
156303-00	0.00	0 W	

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated