



Download

DXF 2D
- 784.dxf

Montaggi
- compact.pdf



784 Compact - glass

Housing: in sheet steel.


Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards, 2P + T terminal block in polycarbonate with maximum allowed lead cross section of 2.5 sqmm.

Mounting: Ceiling.

Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards.

Moreover, these products can be installed on normally inflammable surfaces.

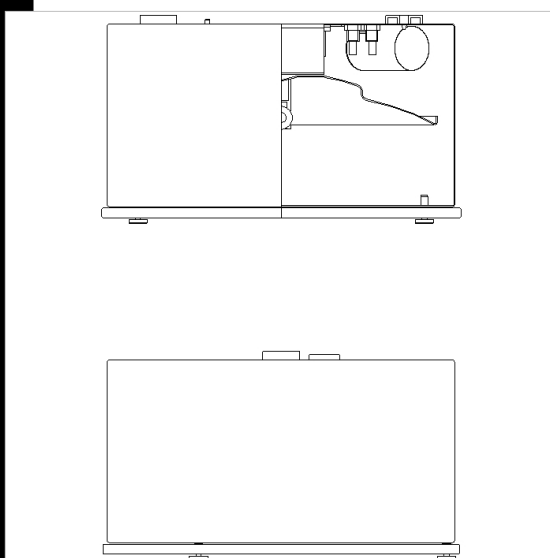

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
156327-00	CELL	2.66	FLC 2x26D/E-1800lm-3000K-Ra 1b	54 W	G24q-3	WHITE
156326-00	CNR-L	3.30	HCI-TS 70-6500lm-4200k-Ra 1a	87 W	Rx7s	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated