



Download

DXF 2D
- d785.dxf

Montaggi
- compact.pdf



785 Compact - cat. 3

Housing: in sheet steel.

Reflector: In vandal-resistant, V2 self-extinguishing polycarbonate, metallized with a C.V.D. high vacuum process using high grade aluminium powders, for better light control and luminous efficiency.

Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate with phosphor bronze contacts. Sockets G24d-3; G24q-3.


Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards, 2P + T terminal block in polycarbonate with maximum allowed lead cross section of 2.5 sqmm.

Equipment: Finish ring with safety springs.

Mounting: Ceiling.

Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards.

Moreover, these products can be installed on normally inflammable surfaces.

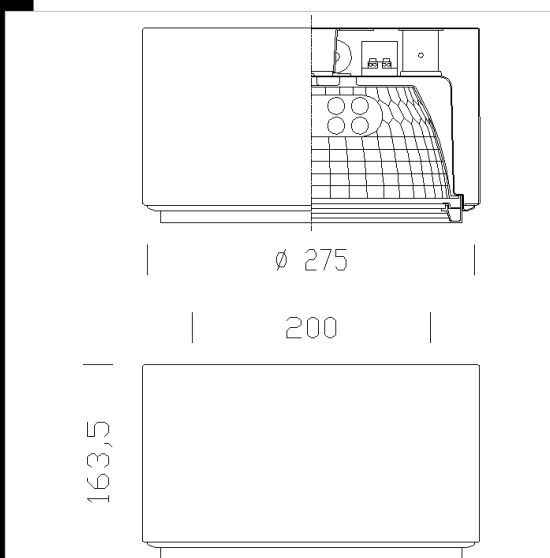

Code	Gear	Kg	Watt	Base	Lamps	Colour
156333-08	CELL	2,16	FLC 2x26D/E	G24q-3	1800lm-4000K-Ra 1b	WHITE