


### 817 Compact - corrosion proof-wide beam

Housing: In pressed sheet steel.  
 Reflector: In pressed, anodized and polished 99.85 high performance aluminium, 6/8 micron thickness.  
 Diffuser: with tempered glass.  
 Painting: Acrylic anionic electrocoating, white, UV-stabilized, upon phosphate treatment.  
 Lampholder: In ceramics, with silver-plated contacts.  
 Electric gear: 230V/50Hz power supply with PTC. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20/20 standards, 2P + T terminal block with maximum allowed lead cross section of 2.5 sqmm.  
 Regulations: Produced according to applicable EN60598 - CEI 34-21 standards, IP54IK07 degree of protection according to EN 60529 standards. Moreover, these products can be installed on normally inflammable surfaces.  
 Emergency light version (FLC1x26D): With separate electric gear box. If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

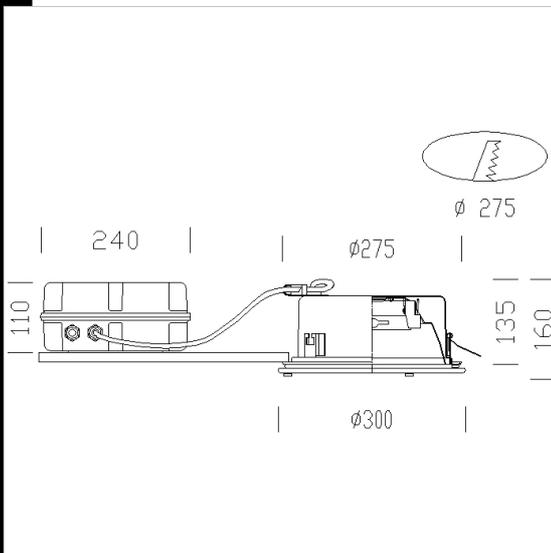

Code	Gear	Kg	Watt	Base	Lamps	Colour
156338-07	CELL-E	5,00	FLC 1x26D	G24d-3	1800lm-4000K-Ra 1b	WHITE
156334-00	CNR-L	4,70	JM-TS 70	Rx7s	6500lm-4200K-Ra 1b	WHITE
156335-00	CNR-L	5,50	JM-TS 150	Rx7s	12500lm-4200K-Ra 1b	WHITE
156336-00	CNR-L	4,70	CDM-TS 70	Rx7s	6500lm-3000K-Ra 82	WHITE
156337-00	CNR-L	5,50	CDM-TS 150	Rx7s	13250lm-3000K-Ra 1b	WHITE

**Download**  
 DXF 2D  
 - 817\_818.dxf  
 Montaggi  
 - compact.pdf