



Download

DXF 2D
- heal216b.dxf



911 Health Dark UGR<19 - Ø216 - DIP SWITCH

Body: in die-cast aluminium

Lens: in PMMA lens with high efficiency output and very low glare rate. Dark light Screen: in anti-glare metalized plastic material. Coating: epoxy powder coating in UV resistant polyester Equipment: spotlights are equipped with zinc-coated steel support brackets with housing for springs to clamp the fixture to the false ceiling

UGR glare index: UGR<19 (in any situation) - EN 12464.


LED power factor: 0.9

80% lumen maintenance: 50,000h (L80B20)

Photobiological safety class: exempt group.

DIP switch setting: the fixture comes with a dip switch driver for the setting of the output current. In this way you, can ensure the best luminous flux for any lighting design. The possibility to choose the correct drive current for LEDs will allow you to have the right power under specific design conditions. Using a lower current will improve the efficiency of fixtures and therefore increase energy savings, whilst a higher current will result in a higher light flux so that you can reduce the number of fixtures.

156477-00 DIP SWITCH	I out	W tot	K - Ølm	- CRI	600	22	4000K
2900lm - CRI 80	700	26	4000K - 3315lm - CRI 80	800	30	4000K	-
3740lm - CRI 80	900	33	4000K - 4150lm - CRI 80	950	35	4000K	-
4340lm - CRI 80							

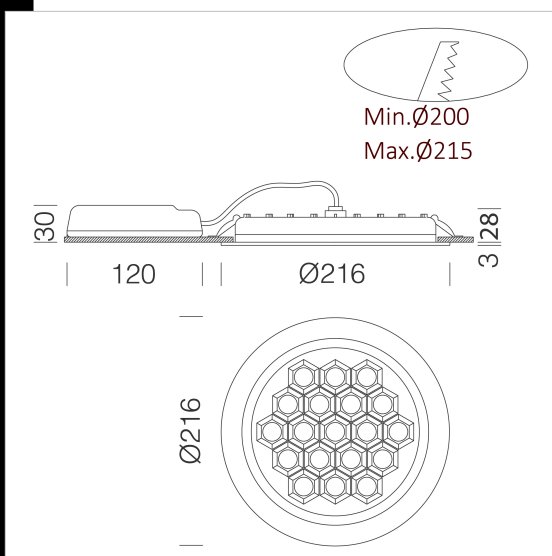

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
156477-00	CLD	0,55	LED-3740lm-4000K-CRI 80	30 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated