

CELL-D


Download

DXF 2D
- 825_826.dxf



825 Comfort T5 - opal diffuser

Housing: In sheet, with narrow rim and holes provided to attach the shutter.
 Shield: Flat opal plexiglass diffuser.
 Painting: with white acrylic powder coating, UV-stabilized, anti-yellowing.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G5.
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards.
 2P+T terminal block w/ or w/o fuseholder, with maximum allowed lead cross section of 2.5 sqmm.
 Mounting: recessed in module 600 shooks or panels.
 Equipment: 6.3A protection fuse (art. CNR-R). Supplied without brackets for direct contact mounting onto the cross Ts. In case of non-contact mounting, use brackets acc.901.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK03 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.
 Additional gear: Electronic ballast.
 Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

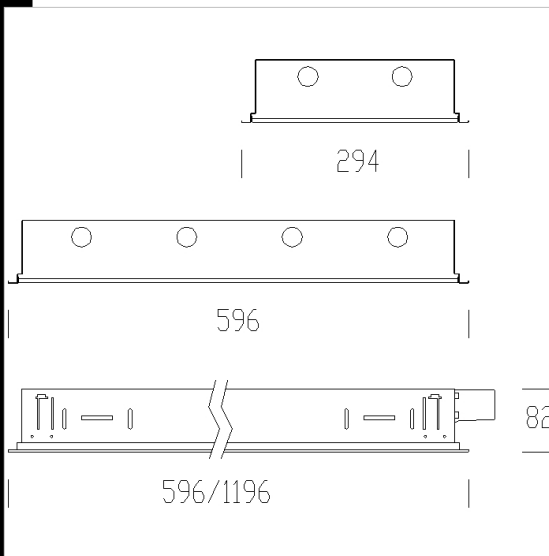

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
156533-09	CELL-E	10.56	FL 4x28-2650lm-4000K-Ra 1b	124 W	G5	WHITE
156531-09	CELL-E	5.89	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
156531-00	CELL	5.23	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
156533-00	CELL	9.22	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	WHITE
156531-12	CELL-D	5.27	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
156533-0041	CELL-D-D	9.84	FL 4x28-2650lm-4000K-Ra 1b	121 W	G5	WHITE
156531-0041	CELL-D-D	5.17	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
156533-12	CELL-D	8.58	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	WHITE
156530-00	CELL	2.97	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
156532-00	CELL	4.92	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
156532-09	CELL-E	5.34	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated