



826 Comfort T8 - frosted diffuser

Housing: In sheet, with various rim finishings and holes provided to attach the shutter.

Shield: Flat frosted plexiglass diffuser.

Painting: with white acrylic powder coating, UV-stabilized, anti-yellowing.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13. Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block w/ or w/o fuseholder, with maximum allowed lead cross section of 2.5 sqmm.


Mounting: recessed into shooks or module 600 panels

Equipment: 6.3A protection fuse (art. CNR-R). Supplied without brackets for direct contact mounting onto the cross Ts. In case of non-contact mounting, use brackets acc.901.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK03 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast.

Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

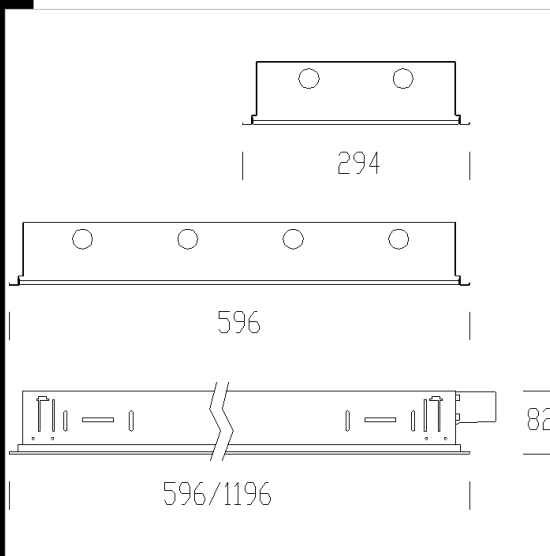

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
156620-08	CEL	3.40	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
156623-08	CEL	8.54	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
156623-0041	CEL-D-D	8.11	FL 4x36-3350lm-4000K-Ra 1b	141 W	G13	WHITE
156622-09	CEL-E	5.20	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
156623-12	CEL-D	8.90	FL 4x36-3350lm-4000K-Ra 1b	148 W	G13	WHITE
156622-0041	CEL-D-D	4.75	FL 4x18-1350lm-4000K-Ra 1b	79 W	G13	WHITE
156622-08	CEL	4.74	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE
156621-09	CEL-E	5.30	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
156622-12	CEL-D	4.76	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
156621-08	CEL	4.60	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
156623-09	CEL-E	9.00	FL 4x36-3350lm-4000K-Ra 1b	149 W	G13	WHITE
156621-12	CEL-D	4.97	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	WHITE
156621-0041	CEL-D-D	5.05	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE

Accessories



- 901 adjustable bracket

Download

- DXF 2D
- 825_826.dxf
- 3DS
- 825_2x36.3ds
- 3DM
- 825_2x36.3dm
- Montaggi
- bs_do_sc.dxf
- bs_pan.dxf
- bs_p_ap.dxf
- comior1 825-826-830.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated