

990 Steel T8 - steel+glass

Housing: In pressed steel drawn in a single piece with high mechanical resistance. Complete with frame.

Reflector: In 2 micron thick, high-gloss, anodized aluminium, exceptional crosswise dimensions for high efficiency.

Painting: In polyester powder, RAL 7035 colour, upon phosphate treatment, resistant to corrosion and salty environments.

Lampholder: In polycarbonate, with contacts in phosphor bronze.

Electric gear: 230-240V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.


Equipment: 6.3 A protective fuse. Silicone rubber gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets. When opened, the frame remains attached to the housing for easy maintenance

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast and emergency kit.

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

N.B.: Versions FL2/3x18 with quick plug-socket connector are available on request.

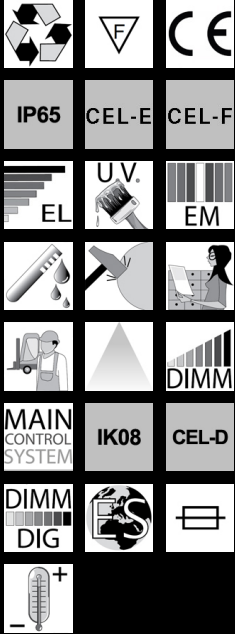

Download
DXF 2D
- 990d.dxf
Montaggi
- grado di inclinazione.dxf
- steel_terna.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
162154-08	CEL-F	6.01	FL 3x18-1350lm-4000K-Ra 1b	55 W	G13	GREY
162153-08	CEL-F	13.63	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	GREY
162156-09	CELF-E	17.60	FL 3x58-5200lm-4000K-Ra 1b	172 W	G13	GREY
162155-09	CELF-E	13.40	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	GREY
162155-08	CEL-F	12.90	FL 3x36-3350lm-4000K-Ra 1b	107 W	G13	GREY
162156-12	CELF-D	12.89	FL 3x58-5200lm-4000K-Ra 1b	163 W	G13	GREY
162156-08	CEL-F	17.20	FL 3x58-5200lm-4000K-Ra 1b	169 W	G13	GREY
162152-12	CELF-D	10.09	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	GREY
162151-08	CEL-F	6.90	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	GREY
162153-09	CELF-E	14.20	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	GREY
162154-09	CELF-E	6.39	FL 3x18-1350lm-4000K-Ra 1b	58 W	G13	GREY
162152-09	CELF-E	12.30	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	GREY
162155-12	CELF-D	12.90	FL 3x36-3350lm-4000K-Ra 1b	129 W	G13	GREY
162151-09	CELF-E	7.40	FL 2x18-1350lm-4000K-Ra 1b	41 W	G13	GREY
162152-08	CEL-F	11.80	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	GREY
162153-12	CELF-D	12.19	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	GREY
162154-12	CEL-F	8.00	FL 3x18-1350lm-4000K-Ra 1b	69 W	G13	GREY
162151-12	CELF-D	6.23	FL 2x18-1350lm-4000K-Ra 1b	39 W	G13	GREY

Accessories



- 996 adjustable bracket



- 945 - narrow beam 2-lamp reflector



- 133 - coupling for 60 diam. tubes



- 127 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated