


992 Eterna -T5 Diffusor in tempered glass

Housing: In AISI 304 18/8 stainless steel, drawn in a single piece with high mechanical resistance. Complete with frame and stainless steel catches.  
 Reflector: In 2 micron thick, high-gloss, anodized aluminium, exceptional crosswise dimensions for high efficiency.  
 Diffuser: In 5 mm thick, shock-resistant tempered glass.  
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.  
 Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.  
 Equipment: 6.3 A protective fuse. Silicone rubber gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets. When opened, the frame remains attached to the housing for easy maintenance.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.

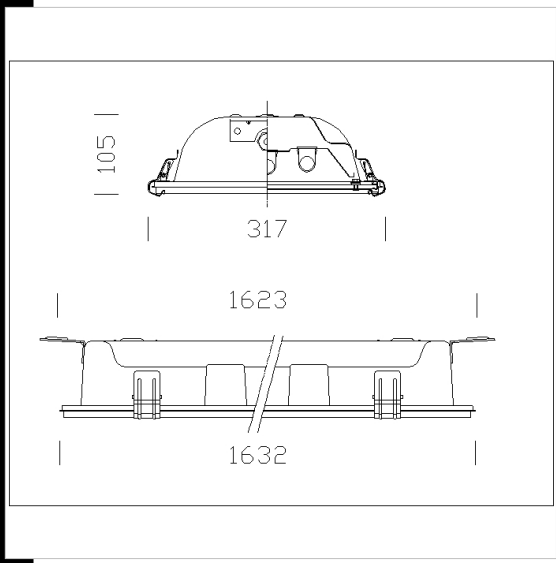

**Download**  
 DXF 2D  
 - 99215.dxf  
 3DS  
 - 992\_eterna\_2x36.3ds  
 3DM  
 - 992\_eterna\_2x36.3dm  
 Montaggi  
 - steel\_eterna.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
162316-09	CELLF-E	6.57	FL 3x24-1750lm-4000K-Ra 1b	82 W	G5	STAINLESS STEEL
162337-00	CELL-F	12.49	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	STAINLESS STEEL
162310-09	CELLF-E	6.41	FL 2x24-1750lm-4000K-Ra 1b	52 W	G5	STAINLESS STEEL
162310-00	CELL-F	5.93	FL 2x24-1750lm-4000K-Ra 1b	49 W	G5	STAINLESS STEEL
162317-00	CELL-F	10.15	FL 3x54 constant-4850lm-4000K-Ra 1b	168 W	G5	STAINLESS STEEL
162318-00	CELL-F	12.53	FL 3x49-4350lm-4000K-Ra 1b	165 W	G5	STAINLESS STEEL
162318-12	CELLF-D	13.00	FL 3x49-4350lm-4000K-Ra 1b	160 W	G5	STAINLESS STEEL
162317-09	CELLF-E	10.85	FL 3x54 constant-4850lm-4000K-Ra 1b	172 W	G5	STAINLESS STEEL
162314-09	CELLF-E	10.85	FL 2x54-4450lm-4000K-Ra 1b	113 W	G5	STAINLESS STEEL
162315-09	CELLF-E	13.01	FL 2x49-4350lm-4000K-Ra 1b	115 W	G5	STAINLESS STEEL
162314-00	CELL-F	10.07	FL 2x54-4450lm-4000K-Ra 1b	109 W	G5	STAINLESS STEEL
162314-12	CELLF-D	11.80	FL 2x54-4450lm-4000K-Ra 1b	107 W	G5	STAINLESS STEEL
162317-12	CELLF-D	12.90	FL 3x54 constant-4850lm-4000K-Ra 1b	173 W	G5	STAINLESS STEEL
162315-00	CELL-F	12.45	FL 2x49-4350lm-4000K-Ra 1b	111 W	G5	STAINLESS STEEL
162318-09	CELLF-E	16.40	FL 3x49-4350lm-4000K-Ra 1b	170 W	G5	STAINLESS STEEL
162338-00	CELL-F	12.40	FL 3x80 constant-6800lm-4000K-Ra 1b	257 W	G5	STAINLESS STEEL
162316-00	CELL-F	6.17	FL 3x24-1750lm-4000K-Ra 1b	79 W	G5	STAINLESS STEEL
162315-12	CELLF-D	15.90	FL 2x49-4350lm-4000K-Ra 1b	97 W	G5	STAINLESS STEEL

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

**Accessories**

Accessories



- 996 adjustable bracket



- 945 - narrow beam 2-lamp reflector



- 133 - coupling for 60 diam. tubes



- 127 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated