

## 992 Eterna T8 - stainless steel+glass



Housing: In AISI 304 18/8 stainless steel, drawn in a single piece with high mechanical resistance. Complete with frame and stainless steel catches.

Reflector: In 2 micron thick, high-gloss, anodized aluminium, exceptional crosswise dimensions for high efficiency.

Diffuser: In 5 mm thick, shock-resistant tempered glass.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.


Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.

Equipment: 6.3 A protective fuse. Silicone rubber gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets. When opened, the frame remains attached to the housing for easy maintenance.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast and emergency kit.

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

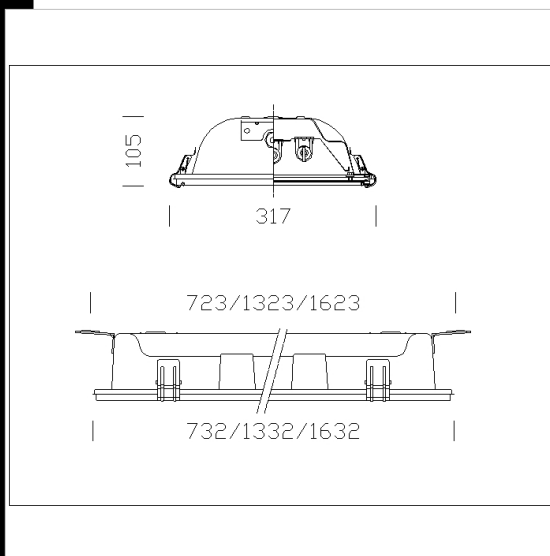

Code	Gear	Kg	Watt	Base	Lamps	Colour
162333-00	CEL-F	15,90	FL 2x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL
162332-00	CEL-F	11,80	FL 2x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162335-00	CEL-F	12,90	FL 3x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162332-09	CELF-E	12,30	FL 2x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162336-09	CELF-E	13,50	FL 3x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL
162336-00	CEL-F	13,00	FL 3x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL
162332-12	CELF-D	10,31	FL 2x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162335-09	CELF-E	12,90	FL 3x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162335-12	CELF-D	12,90	FL 3x36	G13	3350lm-4000K-Ra 1b	STAINLESS STEEL
162344-09	CELF-E	6,18	FL 3x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162344-12	CELF-D	8,00	FL 3x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162344-08	CEL-F	5,93	FL 3x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162331-09	CELF-E	7,40	FL 2x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162331-12	CELF-D	6,53	FL 2x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162333-12	CELF-D	12,09	FL 2x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL
162331-00	CEL-F	6,90	FL 2x18	G13	1350lm-4000K-Ra 1b	STAINLESS STEEL
162336-12	CELF-D	12,41	FL 3x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL
162333-09	CELF-E	16,40	FL 2x58	G13	5200lm-4000K-Ra 1b	STAINLESS STEEL

### Accessories



- 996 adjustable bracket



- 945 - narrow beam 2-lamp reflector



- 133 - coupling for 60 diam. tubes



- 127 bracket

- DIMM
- DIG
- IK08
- CELL-F
- CE
- IP65
- CNR-F
- CEL-F
- EL
- EM
- MAIN CONTROL SYSTEM
- CNRF-E

### Download

- DXF 2D  
- d992.dxf
- 3DS  
- 992\_eterna\_2x36.3ds
- 3DM  
- 992\_eterna\_2x36.3dm
- Montaggi  
- steel\_eterna.pdf