



989 Eterna T8 - stainless steel+polycarbonate






Housing: In AISI 304 18/8 stainless steel, drawn in a single piece with high mechanical resistance. Stainless steel catches.
 Reflector: In 2 micron thick, high-gloss, anodized aluminium, exceptional crosswise dimensions for high efficiency.
 Diffuser: In vandal resistant and V2 self-extinguishing polycarbonate not resistant to mineral oils.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
 Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.
 Equipment: 6.3 A protective fuse. Environment-friendly polyurethane foam gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.
 Additional gear: Electronic ballast and emergency kit.
 Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.



CEL-F-E  


 IP65 


CEL-F  U.V. 


  

MAIN CONTROL SYSTEM  CELF-D

DIMM DIG  



Download
 DXF 2D
 - d989.dxf
 Montaggi
 - steel_eterna.pdf

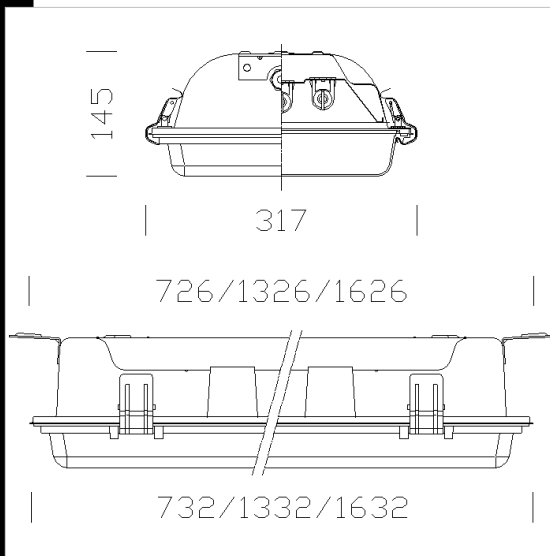Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
162366-08	CEL-F	12.40	FL 3x58-5200lm-4000K-Ra 1b	169 W	G13	STAINLESS STEEL
162365-09	CEL-F-E	9.60	FL 3x36-3350lm-4000K-Ra 1b	108 W	G13	STAINLESS STEEL
162365-08	CEL-F	9.10	FL 3x36-3350lm-4000K-Ra 1b	107 W	G13	STAINLESS STEEL
162363-09	CEL-F-E	11.60	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	STAINLESS STEEL
162362-09	CEL-F-E	7.50	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	STAINLESS STEEL
162363-08	CEL-F	11.10	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	STAINLESS STEEL
162362-12	CEL-F-D	5.95	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	STAINLESS STEEL
162365-12	CEL-F-D	9.10	FL 3x36-3350lm-4000K-Ra 1b	129 W	G13	STAINLESS STEEL
162363-12	CEL-F-D	7.00	FL 2x58-5200lm-4000K-Ra 1b	134 W	G13	STAINLESS STEEL
162361-09	CEL-F-E	4.17	FL 2x18-1350lm-4000K-Ra 1b	41 W	G13	STAINLESS STEEL
162366-09	CEL-F-E	12.40	FL 3x58-5200lm-4000K-Ra 1b	108 W	G13	STAINLESS STEEL
162366-12	CEL-F-D	12.40	FL 3x58-5200lm-4000K-Ra 1b	201 W	G13	STAINLESS STEEL
162362-08	CEL-F	7.00	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	STAINLESS STEEL
162361-08	CEL-F	5.70	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	STAINLESS STEEL

Accessories



- 996 adjustable bracket



- 945 - narrow beam 2-lamp reflector



- 133 - coupling for 60 diam. tubes



- 127 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated