

Download

DXF 2D
- d989.dxf

Montaggi
- steel_eterna.pdf



989 Eterna T5 - stainless steel+polycarbonate

Housing: In AISI 304 18/8 stainless steel, drawn in a single piece with high mechanical resistance. Stainless steel catches.

Reflector: In 2 micron thick, high-gloss, anodized aluminium, exceptional crosswise dimensions for high efficiency.

Diffuser: In vandal resistant and V2 self-extinguishing polycarbonate not resistant to mineral oils.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G5.


Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.

Equipment: 6.3 A protective fuse. Environment-friendly polyurethane foam gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast and emergency kit.

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

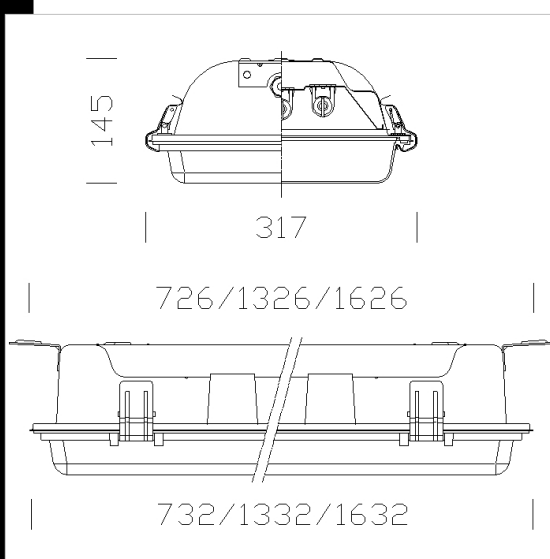

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
162393-09	CELLF-E	6,20	FL 3x24-1750lm-4000K-Ra 1b	82 W	G5	STAINLESS STEEL
162394-09	CELLF-E	6,83	FL 3x54 constant-4850lm-4000K-Ra 1b	172 W	G5	STAINLESS STEEL
162390-09	CELLF-E	6,20	FL 2x24-1750lm-4000K-Ra 1b	52 W	G5	STAINLESS STEEL
162391-09	CELLF-E	7,50	FL 2x54-4450lm-4000K-Ra 1b	113 W	G5	STAINLESS STEEL
162392-00	CELL-F	7,28	FL 2x49-4350lm-4000K-Ra 1b	111 W	G5	STAINLESS STEEL
162393-00	CELL-F	5,70	FL 3x24-1750lm-4000K-Ra 1b	79 W	G5	STAINLESS STEEL
162394-00	CELL-F	6,47	FL 3x54 constant-4850lm-4000K-Ra 1b	168 W	G5	STAINLESS STEEL
162395-00	CELL-F	7,54	FL 3x49-4350lm-4000K-Ra 1b	165 W	G5	STAINLESS STEEL
162395-09	CELLF-E	12,90	FL 3x49-4350lm-4000K-Ra 1b	170 W	G5	STAINLESS STEEL
162392-09	CELLF-E	8,12	FL 2x49-4350lm-4000K-Ra 1b	115 W	G5	STAINLESS STEEL
162395-12	CELLF-D	12,40	FL 3x49-4350lm-4000K-Ra 1b	160 W	G5	STAINLESS STEEL
162394-12	CELLF-D	9,10	FL 3x54 constant-4850lm-4000K-Ra 1b	173 W	G5	STAINLESS STEEL
162392-12	CELLF-D	11,10	FL 2x49-4350lm-4000K-Ra 1b	97 W	G5	STAINLESS STEEL
162393-12	CELLF-D	5,70	FL 3x24-1750lm-4000K-Ra 1b	79 W	G5	STAINLESS STEEL
162391-00	CELL-F	5,99	FL 2x54-4450lm-4000K-Ra 1b	109 W	G5	STAINLESS STEEL
162390-00	CELL-F	3,83	FL 2x24-1750lm-4000K-Ra 1b	49 W	G5	STAINLESS STEEL
162391-12	CELLF-D	7,00	FL 2x54-4450lm-4000K-Ra 1b	107 W	G5	STAINLESS STEEL
162390-12	CELLF-D	5,70	FL 2x24-1750lm-4000K-Ra 1b	49 W	G5	STAINLESS STEEL

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessori

989 Eterna T5 - stainless steel+polycarbonate

Accessori



- 996 adjustable bracket



- 945 - narrow beam 2-lamp reflector



- 133 - coupling for 60 diam. tubes



- 127 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated