




998 Eterna -stainless steel+glass/asymmetric reflector

Housing: In AISI 304 18/8 stainless steel, drawn in a single piece with high mechanical resistance.
 Diffuser: In 5 mm thick, shock-resistant tempered glass.
 Reflector: Asymmetric in high-gloss aluminium, exceptional crosswise dimensions for high efficiency.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
 Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90° according to CEI 20-20 standards. 2P+T terminal block and max allowed lead cross section of 2.5 sqmm.
 Equipment: 3.15 A. Silicone rubber gasket. Fibreglass nylon cable gland Ø 1/2 gas thread. Complete with ceiling mounting brackets. When opened, the frame remains attached to the housing for easy maintenance.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Can be installed on normally inflammable surfaces.

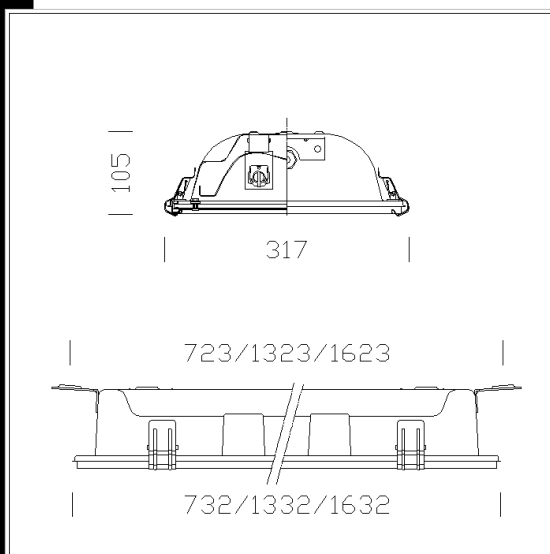

Download

- DXF 2D
- 998.dxf
- 3DS
- 992_eterna_2x36.3ds
- 3DM
- 992_eterna_2x36.3dm
- Montaggi
- steel_eterna.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
162421-00	CEL-F	11,00	FL 1x36-3350lm-4000K-Ra 1b	37 W	G13	STAINLESS STEEL
162422-00	CEL-F	15,10	FL 1x58-5200lm-4000K-Ra 1b	56 W	G13	STAINLESS STEEL
162454-00	CELL-F	15,10	FL 1x80-6550lm-4000k-Ra 1b	79 W	G5	STAINLESS STEEL
162453-00	CELL-F	15,10	FL 1x49-4350lm-4000K-Ra 1b	55 W	G5	STAINLESS STEEL
162420-00	CEL-F	6,50	FL 1x18-1350lm-4000K-Ra 1b	20 W	G13	STAINLESS STEEL

Accessori



- 996 adjustable bracket



- 133 - coupling for 60 diam. tubes



- 127 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated