

981 Lunar T8

Housing: Injection moulded, in RAL 7035 grey, vandal resistant and self-extinguishing, UV-stabilized polycarbonate with high mechanical resistance due to the frame reinforced by internal ribbing.


Diffuser: Anti-dazzle protective tube in clear polycarbonate, scored inside and smooth outside, dust-proof, vandal resistant and V2 self-extinguishing. UV-stabilized, anti-yellowing.

Lampholder: Water-proof in polycarbonate, with bronze contacts. Socket G13.
Electric gear: 230V/50 Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standards. 2P terminal block with maximum allowed lead cross-section of 4 sqmm.

Equipment: Nylon fibreglass cable gland, Ø 1/2 gas thread. Spring hook in stainless steel, for suspension by chain. Environment-friendly gasket in polyurethane foam.

Mounting: Suspended, ceiling or on commercial track
Regulations: Produced according to applicable EN60598-1 CEI34-21 standards, degree of protection IP65IK08 according to EN 60529 standards. Can be installed on normally inflammable surfaces. They have been granted the ENEC European Certificate of Conformity. Glow wire tested at 850°C. Insulation class II.

Additional gear: Electronic ballast and emergency kit.
Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

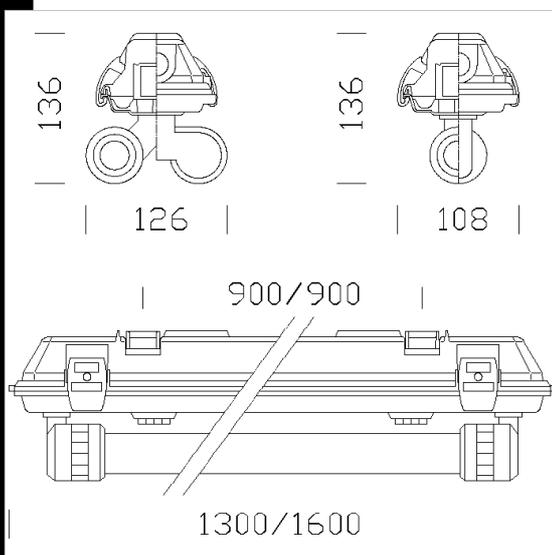

Download

DXF 2D

- 981.dxf

Montaggi

- lunar.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
166444-08	CEL	1,24	FL 2x18-1350lm-4000K-Ra 1b	34 W	G13	GREY
166445-09	CEL-E	2,50	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	GREY
166442-09	CEL-E	2,40	FL 1x36-3350lm-4000K-Ra 1b	40 W	G13	GREY
166446-09	CEL-E	3,10	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	GREY
166443-08	CEL	2,60	FL 1x58-5200lm-4000K-Ra 1b	56 W	G13	GREY
166445-08	CEL	1,96	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	GREY
166446-08	CEL	2,60	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	GREY
166442-08	CEL	1,90	FL 1x36-3350lm-4000K-Ra 1b	37 W	G13	GREY
166443-09	CEL-E	3,10	FL 1x58-5200lm-4000K-Ra 1b	59 W	G13	GREY

Accessori



- 938 junction sleeve



- 937 1-lamp ceiling bracket



- 967 steel reflector for art.981



- 968 aluminium reflector for art.981



- 969 narrow-beam reflector for art.981

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated