


409 Wing - direct or indirect light

Housing: In extruded aluminium with die-cast aluminium end caps
 Diffuser: In smooth antidazzle, dust-proof plexiglass.
 Reflector: in high gloss bent aluminium, with high luminous efficiency
 Painting: with white acrylic powder coating, UV-stabilized, anti-yellowing, upon phosphate treatment.
 Lampholder: In polycarbonate, with phosphor bronze contacts
 Electric gear: 230V/50 Hz power supply. Rigid wire, 0,50 sqmm cross-section and PVC-HT sheath, resistant up to 90°C according to CEI 20/20 standards. 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.
 Standard supply: Universal connection for both ceiling and wall mounting. End caps feature a half-blank section for mounting in continuous lines. 3.15A protection fuse
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK03 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.
 Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on (maintained version), thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

Download

DXF 2D
- d409n.dxf

Montaggi
- 409.pdf

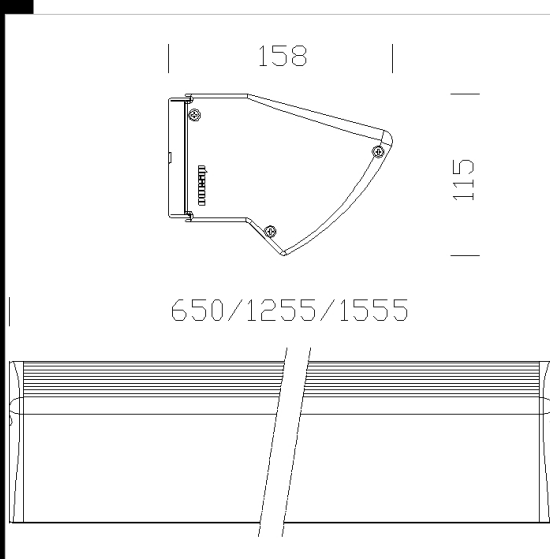

| Code | Gear | Kg | Lumen-K-CRI | WTot | Base | Colour |
|-----------|---------|------|------------------------------|------|------|--------|
| 214432-00 | CELL-F | 4.00 | FL 1x28-2650lm-4000K-Ra 1b | 30 W | G5 | WHITE |
| 214433-09 | CELLF-E | 4.50 | FL 2x28-2650lm-4000K-Ra 1b | 64 W | G5 | WHITE |
| 214434-00 | CELL-F | 5.00 | FL 1x35-3350lm-4000K-Ra 1b | 38 W | G5 | WHITE |
| 214435-09 | CELLF-E | 6.00 | FL 2x35-3350lm-4000K-Ra 1b | 79 W | G5 | WHITE |
| 214426-00 | CELL-F | 2.00 | FLC 1x55L-4800lm-4000K-Ra 1b | 50 W | 2G11 | WHITE |
| 214430-12 | CELLF-D | 2.44 | FL 1x14-1250lm-4000K-Ra 1b | 18 W | G5 | WHITE |
| 214431-12 | CELLF-D | 2.73 | FL 2x14-1250lm-4000K-Ra 1b | 34 W | G5 | WHITE |
| 214432-12 | CELLF-D | 4.00 | FL 1x28-2650lm-4000K-Ra 1b | 31 W | G5 | WHITE |
| 214433-12 | CELLF-D | 4.40 | FL 2x28-2650lm-4000K-Ra 1b | 64 W | G5 | WHITE |
| 214434-12 | CELLF-D | 4.82 | FL 1x35-3350lm-4000K-Ra 1b | 39 W | G5 | WHITE |
| 214432-09 | CELLF-E | 4.50 | FL 1x28-2650lm-4000K-Ra 1b | 34 W | G5 | WHITE |
| 214431-00 | CELL-F | 2.40 | FL 2x14-1250lm-4000K-Ra 1b | 34 W | G5 | WHITE |
| 214433-00 | CELL-F | 3.50 | FL 2x28-2650lm-4000K-Ra 1b | 60 W | G5 | WHITE |
| 214435-00 | CELL-F | 5.50 | FL 2x35-3350lm-4000K-Ra 1b | 75 W | G5 | WHITE |
| 214435-12 | CELLF-D | 5.50 | FL 2x35-3350lm-4000K-Ra 1b | 78 W | G5 | WHITE |
| 214430-00 | CELL-F | 2.00 | FL 1x14-1250lm-4000K-Ra 1b | 15 W | G5 | WHITE |
| 214434-09 | CELLF-E | 5.50 | FL 1x35-3350lm-4000K-Ra 1b | 42 W | G5 | WHITE |

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated