



418 Rigo

Housing: in extruded aluminium with ABS end caps.

Optics: in high-gloss aluminium

Diffuser: in opal polycarbonate, fluted inside, smooth on the outside, dust-proof, UV stabilized.


Coating: polyester powder coating, UV stabilized.

Electric gear: 220-240-50-60Hz power supply.

Equipment: supplied with brackets for wall or ceiling mounting.

Available upon request in the continuous line version with socket-pin connector.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

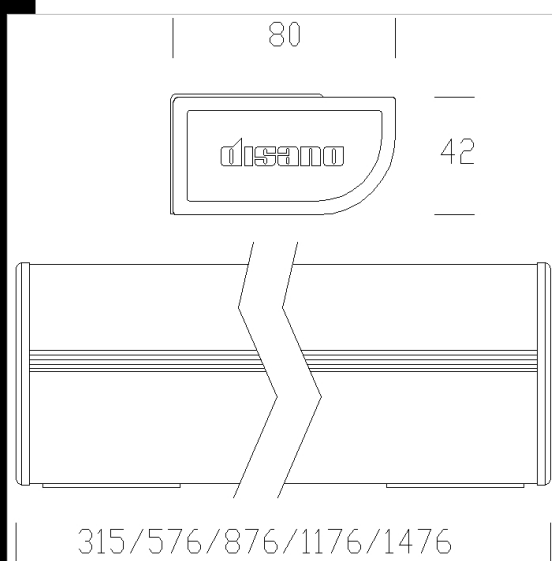

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
214564-54	CELL	1,83	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE
214561-92	CELL	0,86	FL 1x14-1250lm-4000K-Ra 1b	17 W	G5	WHITE
214564-07	CELL-E	3,00	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE
214563-54	CELL	1,58	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
214562-92	CELL	1,33		23 W		WHITE
214561-00	CELL	0,90	FL 1x14-1250lm-4000K-Ra 1b	17 W	G5	WHITE
214562-07	CELL-E	2,00		24 W		WHITE
214562-54	CELL	1,33		23 W		WHITE
214564-00	CELL	1,90	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE
214563-00	CELL	1,54	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
214561-54	CELL	0,98	FL 1x14-1250lm-4000K-Ra 1b	17 W	G5	WHITE
214563-07	CELL-E	2,20	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
214560-00	CELL	0,60	FL 1x8-450lm-4000K-Ra 1b	10 W	G5	WHITE
214563-92	CELL	1,58	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	WHITE
214562-00	CELL	1,30		23 W		WHITE
214564-92	CELL	1,83	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	WHITE

Download

DXF 2D
- 418.dxf

Montaggi
- 418_rigo.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated