


Download

DXF 2D
- 5222.dxf



Conveyor mm.82

In steel. To direct the light beam in one direction. For DICR, ALO

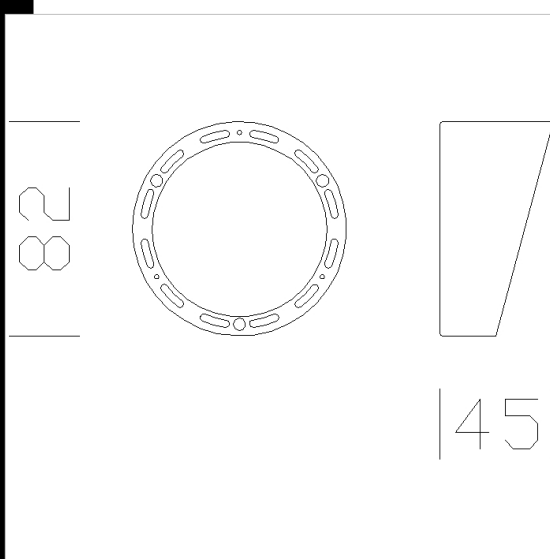

Code	Kg	WTot	Colour
22005277-00	0,50	0 W	SILVER
22005232-00	0,20	0 W	BLACK
22005222-00	0,20	0 W	WHITE

Prodotti



- Vision C+M - CDM-R



- Vision C+M short - CDM-R -



- Vision C+M - CDM-TC



- Vision C+M short - CDM-TC -



- Vision C+M short - CDM-TC -
FM - Base



- Vision C+M short - CDM-R -
Base



- Mini Leo 5 - Base version



- Matrix A2 MASTERLED



- Mini Leo 5 - Universal adapter

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated