


Sintesi System - ceiling - Dark light - UGR<19

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Dark light louvre: double parabolic louvres, in high-gloss 99.99 aluminium, anti-glare and anti-iridescence, very low luminance with PVD treatment or in double parabolic louvres, in high-gloss 99.85 aluminium. Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

Download

DXF 2D
- sintesipla.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

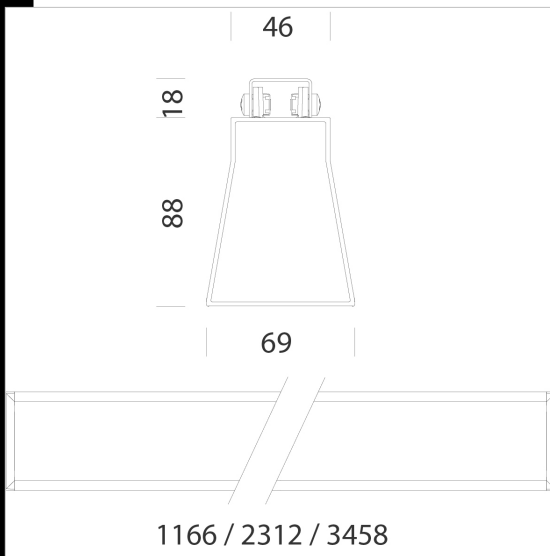

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010010-00	CLD	2,88	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010010-1241	CLD-D-D	3,69	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010010-09	CLD-E	3,31	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010010-39	CLD	2,86	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010010-3941	CLD-D-D	2,96	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010010-0928	CLD CELL-E	0,00	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010011-00	CLD	5,51	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010011-1241	CLD-D-D	5,53	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010011-09	CLD-E	6,00	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010011-31	CLD CELL-E	0,00	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010011-39	CLD CELL	0,00	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010011-3941	CLD-D-D	5,50	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010011-0928	CLD CELL-E	0,00	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010011-3957	CLD CELL-E	0,00	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010012-00	CLD	3,69	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010012-1241	CLD-D-D	3,69	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010012-09	CLD-E	3,69	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010012-31	CLD CELL-E	0,00	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010012-39	CLD CELL	0,00	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010012-3941	CLD-D-D	8,17	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010012-0928	CLD CELL-E	0,00	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010012-3957	CLD CELL-E	0,00	LED-7006lm-3000K-CRI 80	81 W	WHITE

Accessori



- Sintesi Spot - UGR<22 - light module



- Closing ends 1 - Sintesi



- Connecting bracket - Sintesi



- Sintesi Sensor - light and/or presence detector

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated