




Download

- DXF 2D - sintesisosp.dxf
- Montaggi - SINTESI-SYSTEM REV3.pdf

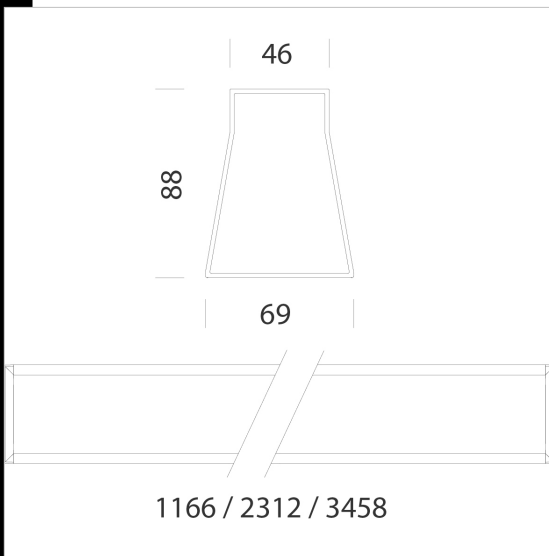

Sintesi System - suspension - Dark light - UGR<19

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Dark light louvre: double parabolic louvres, in high-gloss 99.99 aluminium, anti-glare and anti-iridescence, very low luminance with PVD treatment or in double parabolic louvres, in high-gloss 99.85 aluminium. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010013-00	CLD	2.75	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010013-1241	CLD-D-D	2.87	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010013-09	CLD-E	3.69	LED-2511lm-4000K-CRI 80	29 W	WHITE
22010013-39	CLD	2.75	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010013-3941	CLD-D-D	2.84	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010013-0928	CLD CELL-E	0.00	LED-2335lm-3000K-CRI 80	29 W	WHITE
22010014-00	CLD	5.39	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010014-1241	CLD-D-D	5.43	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010014-09	CLD-E	6.00	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010014-31	CLD CELL-E	0.00	LED-5022lm-4000K-CRI 80	56 W	WHITE
22010014-39	CLD CELL	5.42	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010014-3941	CLD-D-D	5.43	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010014-0928	CLD CELL-E	0.00	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010014-3957	CLD CELL-E	0.00	LED-4670lm-3000K-CRI 80	56 W	WHITE
22010015-00	CLD	7.92	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010015-1241	CLD-D-D	8.01	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010015-09	CLD-E	8.50	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010015-31	CLD CELL-E	0.00	LED-7533lm-4000K-CRI 80	81 W	WHITE
22010015-39	CLD CELL	0.00	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010015-3941	CLD CELL-D-D	0.00	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010015-0928	CLD CELL-E	0.00	LED-7006lm-3000K-CRI 80	81 W	WHITE
22010015-3957	CLD CELL-E	0.00	LED-7006lm-3000K-CRI 80	81 W	WHITE

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- Connecting bracket - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated