


Sintesi System - ceiling - with UGR<19 shield

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: shield in transparent PMMA with micro-lenticular film and glass shielding of UGR<19.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

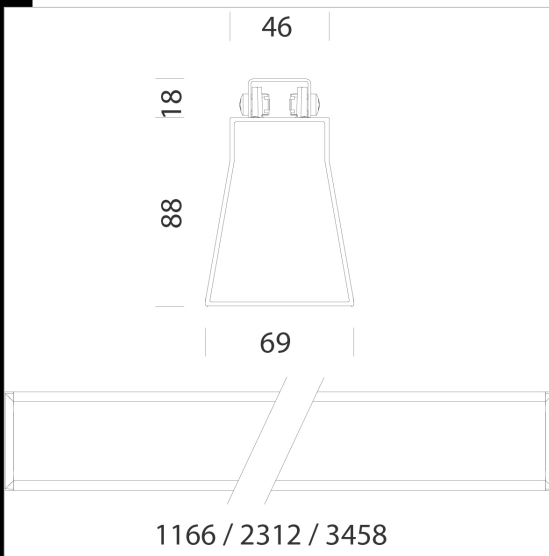

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010110-00	CLD	3,54	LED-2547lm-4000K-CRI 80	29 W	WHITE
22010110-1241	CLD-D-D	3,44	LED-2547lm-4000K-CRI 80	29 W	WHITE
22010110-09	CLD-E	3,69	LED-2547lm-4000K-CRI 80	29 W	WHITE
22010110-39	CLD CELL	0,00	LED-2369lm-3000K-CRI 80	29 W	WHITE
22010110-3941	CLD CELL-D-D	0,00	LED-2369lm-3000K-CRI 80	29 W	WHITE
22010110-0928	CLD CELL-E	0,00	LED-2369lm-3000K-CRI 80	29 W	WHITE
22010111-00	CLD	6,53	LED-5094lm-4000K-CRI 80	56 W	WHITE
22010111-1241	CLD-D-D	6,49	LED-5094lm-4000K-CRI 80	56 W	WHITE
22010111-09	CLD-E	3,69	LED-5094lm-4000K-CRI 80	56 W	WHITE
22010111-31	CLD CELL-E	0,00	LED-5094lm-4000K-CRI 80	56 W	WHITE
22010111-39	CLD CELL	6,47	LED-4737lm-3000K-CRI 80	56 W	WHITE
22010111-3941	CLD CELL-D-D	0,00	LED-4737lm-3000K-CRI 80	56 W	WHITE
22010111-0928	CLD CELL-E	0,00	LED-4737lm-3000K-CRI 80	56 W	WHITE
22010111-3957	CLD CELL-E	0,00	LED-4737lm-3000K-CRI 80	56 W	WHITE
22010112-00	CLD	9,51	LED-7641lm-4000K-CRI 80	81 W	WHITE
22010112-1241	CLD-D-D	3,69	LED-7641lm-4000K-CRI 80	81 W	WHITE
22010112-09	CLD-E	3,69	LED-7641lm-4000K-CRI 80	81 W	WHITE
22010112-31	CLD CELL-E	0,00	LED-7641lm-4000K-CRI 80	81 W	WHITE
22010112-39	CLD	9,35	LED-7106lm-4000K-CRI 80	81 W	WHITE
22010112-3941	CLD CELL-D-D	0,00	LED-7106lm-4000K-CRI 80	81 W	WHITE
22010112-0928	CLD CELL-E	0,00	LED-7106lm-4000K-CRI 80	81 W	WHITE
22010112-3957	CLD CELL-E	0,00	LED-7106lm-4000K-CRI 80	81 W	WHITE

Accessori



- Sintesi Spot - UGR<22 - light module



- Closing ends 1 - Sintesi



- Connecting bracket - Sintesi



- Sintesi Sensor - light and/or presence detector

Download

DXF 2D
- sintesipla.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated