


Sintesi System - suspension direct/indirect - with UGR<19 shield

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: shield in transparent PMMA with micro-lenticular film and glass shielding of UGR<19. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

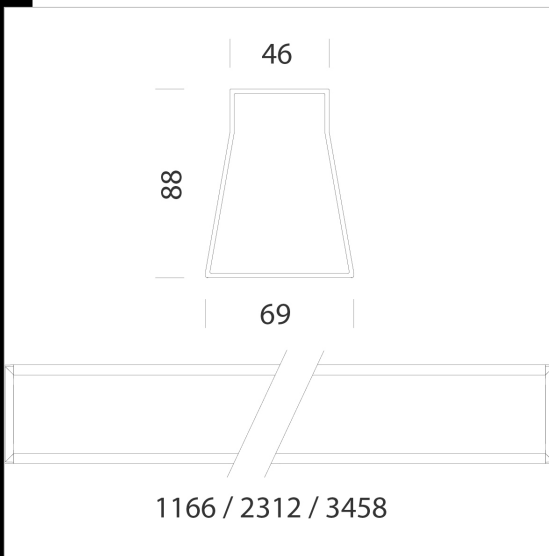

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010116-00	CLD	3,56	LED-3729lm-4000K-CRI 80	40 W	WHITE
22010116-09	CLD CELL-E	0,00		35 W	WHITE
22010116-1241	CLD-D-D	3,61	LED-3729lm-4000K-CRI 80	40 W	WHITE
22010116-39	CLD CELL	0,00	LED-3468lm-3000K-CRI 80	40 W	WHITE
22010116-3941	CLD-D-D	3,68	LED-3468lm-3000K-CRI 80	40 W	WHITE
22010117-00	CLD	6,89	LED-7458lm-4000K-CRI 80	76 W	WHITE
22010117-1241	CLD-D-D	6,93	LED-7458lm-4000K-CRI 80	76 W	WHITE
22010117-09	CLD-E	3,69	LED-7458lm-4000K-CRI 80	76 W	WHITE
22010117-39	CLD	6,90	LED-6936lm-3000K-CRI 80	76 W	WHITE
22010117-3941	CLD-D-D	6,83	LED-6936lm-3000K-CRI 80	76 W	WHITE
22010118-00	CLD	10,03	LED-11187lm-4000K-CRI 80	108 W	WHITE
22010118-1241	CLD-D-D	10,27	LED-11187lm-4000K-CRI 80	108 W	WHITE
22010118-09	CLD-E	3,69	LED-11187lm-4000K-CRI 80	108 W	WHITE
22010118-39	CLD	10,03	LED-10404lm-3000K-CRI 80	108 W	WHITE
22010118-3941	CLD-D-D	10,11	LED-10404lm-3000K-CRI 80	108 W	WHITE

Accessori



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Ceiling suspension O



- Powered suspension O



- Closing ends 1 - Sintesi



- Sintesi Sensor - light and/or presence detector



- Sintesi Spot - UGR<22 - light module



- Connecting bracket - Sintesi



- Suspension with rods O



- Powered suspension with rods O

Download

DXF 2D
- sintesisosp.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated