


## Sintesi System - ceiling with matt shield - UGR<22

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: shield in transparent PMMA with high-performance wide-beam matt film. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

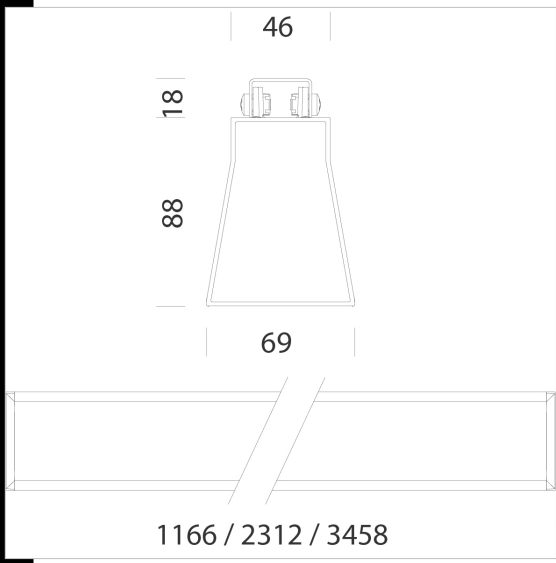

**Download**  
 DXF 2D  
 - sintesipla.dxf  
 Montaggi  
 - SINTESI-SYSTEM REV3.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010210-00	CLD	3.30	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010210-1241	CLD-D-D	3.40	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010210-09	CLD-E	3.69	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010210-39	CLD CELL	3.37	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010210-3941	CLD CELL-D-D	0.00	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010210-0928	CLD CELL-E	0.00	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010211-00	CLD	6.50	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010211-1241	CLD-D-D	6.50	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010211-09	CLD-E	3.69	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010211-31	CLD CELL-E	0.00	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010211-39	CLD CELL	0.00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010211-3941	CLD CELL-D-D	0.00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010211-0928	CLD CELL-E	0.00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010211-3957	CLD CELL-E	0.00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010212-00	CLD	9.49	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010212-1241	CLD-D-D	3.69	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010212-09	CLD-E	3.69	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010212-31	CLD CELL-E	0.00	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010212-39	CLD CELL	0.00	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010212-3941	CLD CELL-D-D	0.00	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010212-0928	CLD CELL-E	0.00	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010212-3957	CLD CELL-E	0.00	LED-7650lm-3000K-CRI 80	81 W	WHITE

### Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated