


Sintesi System - suspension with matt shield - UGR<22

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: shield in transparent PMMA with high-performance wide-beam matt film.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

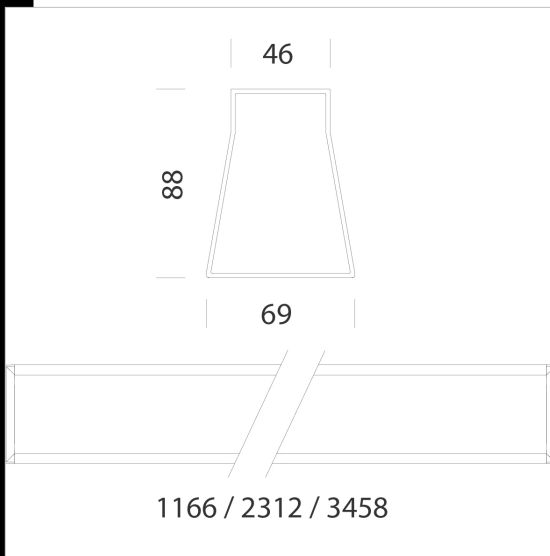

Download

DXF 2D
- sintesisosp.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010213-00	CLD	3,28	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010213-1241	CLD-D-D	3,69	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010213-09	CLD-E	3,69	LED-2742lm-4000K-CRI 80	29 W	WHITE
22010213-39	CLD	3,25	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010213-3941	CLD CELL-D-D	0,00	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010213-0928	CLD CELL-E	0,00	LED-2550lm-3000K-CRI 80	29 W	WHITE
22010214-00	CLD	6,47	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010214-1241	CLD-D-D	6,40	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010214-09	CLD-E	3,69	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010214-31	CLD CELL-E	0,00	LED-5484lm-4000K-CRI 80	56 W	WHITE
22010214-39	CLD CELL	0,00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010214-3941	CLD CELL-D-D	6,38	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010214-0928	CLD CELL-E	0,00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010214-3957	CLD CELL-E	0,00	LED-5100lm-3000K-CRI 80	56 W	WHITE
22010215-00	CLD	7,87	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010215-1241	CLD-D-D	9,40	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010215-09	CLD-E	3,69	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010215-31	CLD CELL-E	0,00	LED-8226lm-4000K-CRI 80	81 W	WHITE
22010215-39	CLD	9,80	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010215-3941	CLD CELL-D-D	0,00	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010215-0928	CLD CELL-E	0,00	LED-7650lm-3000K-CRI 80	81 W	WHITE
22010215-3957	CLD CELL-E	0,00	LED-7650lm-3000K-CRI 80	81 W	WHITE

Accessori



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Ceiling suspension O



- Powered suspension O



- Closing ends 1 - Sintesi



- Sintesi Sensor - light and/or presence detector



- Sintesi Spot - UGR<22 - light module

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Sintesi System - suspension with matt shield - UGR<22

Accessori



- Connecting bracket - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated