




Sintesi System - ceiling 25° bi-asymmetric - UGR<22

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: linear lenses in PMMA with asymmetric - 25° bi-asymmetric and 60° wide-beam light distributions. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

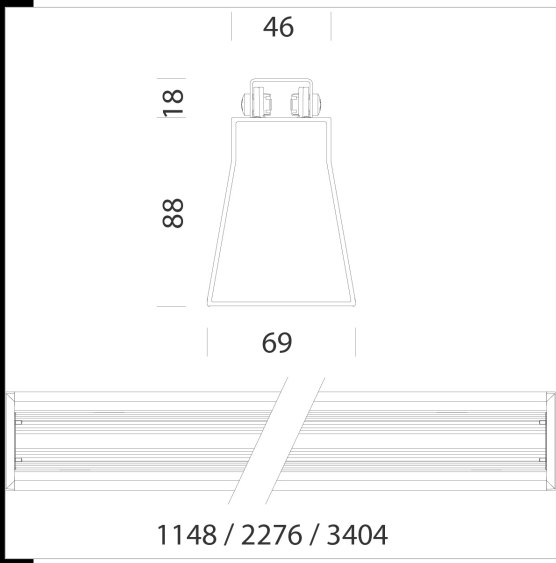

Download
 DXF 2D
 - sintiplaf.dxf
 Montaggi
 - SINTESI-SYSTEM REV3.pdf

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|---------------|------------|------|--------------------------|------|--------|
| 22010310-00 | CLD | 3.69 | LED-3429lm-4000K-CRI 80 | 29 W | WHITE |
| 22010310-1241 | CLD-D-D | 3.69 | LED-3429lm-4000K-CRI 80 | 29 W | WHITE |
| 22010310-09 | CLD-E | 3.69 | LED-3429lm-4000K-CRI 80 | 29 W | WHITE |
| 22010310-39 | CLD CELL | 0.00 | LED-3189lm-3000K-CRI 80 | 29 W | WHITE |
| 22010310-3941 | CLD-D-D | 3.43 | LED-3189lm-3000K-CRI 80 | 29 W | WHITE |
| 22010310-0928 | CLD CELL-E | 0.00 | LED-3189lm-3000K-CRI 80 | 29 W | WHITE |
| 22010311-00 | CLD | 3.69 | LED-6858lm-4000K-CRI 80 | 56 W | WHITE |
| 22010311-1241 | CLD-D-D | 6.43 | LED-6858lm-4000K-CRI 80 | 56 W | WHITE |
| 22010311-09 | CLD-E | 3.69 | LED-6858lm-4000K-CRI 80 | 56 W | WHITE |
| 22010311-31 | CLD CELL-E | 0.00 | LED-6858lm-4000K-CRI 80 | 55 W | WHITE |
| 22010311-39 | CLD CELL | 0.00 | LED-6378lm-3000K-CRI 80 | 55 W | WHITE |
| 22010311-3941 | CLD-D-D | 6.47 | LED-6378lm-3000K-CRI 80 | 56 W | WHITE |
| 22010311-0928 | CLD CELL-E | 0.00 | LED-6378lm-3000K-CRI 80 | 55 W | WHITE |
| 22010311-3957 | CLD CELL-E | 0.00 | LED-6378lm-3000K-CRI 80 | 55 W | WHITE |
| 22010312-00 | CLD | 3.69 | LED-10287lm-4000K-CRI 80 | 81 W | WHITE |
| 22010312-1241 | CLD-D-D | 3.69 | LED-10287lm-4000K-CRI 80 | 81 W | WHITE |
| 22010312-09 | CLD-E | 3.69 | LED-10287lm-4000K-CRI 80 | 81 W | WHITE |
| 22010312-31 | CLD CELL-E | 0.00 | LED-10287lm-4000K-CRI 80 | 82 W | WHITE |
| 22010312-39 | CLD CELL | 0.00 | LED-9567lm-3000K-CRI 80 | 82 W | WHITE |
| 22010312-3941 | CLD-D-D | 9.47 | LED-9567lm-3000K-CRI 80 | 81 W | WHITE |
| 22010312-0928 | CLD CELL-E | 0.00 | LED-9567lm-3000K-CRI 80 | 82 W | WHITE |
| 22010312-3957 | CLD CELL-E | 0.00 | LED-9567lm-3000K-CRI 80 | 82 W | WHITE |

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated