




## Sintesi System - ceiling 25° asymmetric - UGR<22

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: linear lenses in PMMA with asymmetric - 25° bi-asymmetric and 60° wide-beam light distributions. Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

### Download

DXF 2D  
- sintiplaf.dxf  
Montaggi  
- SINTESI-SYSTEM REV3.pdf

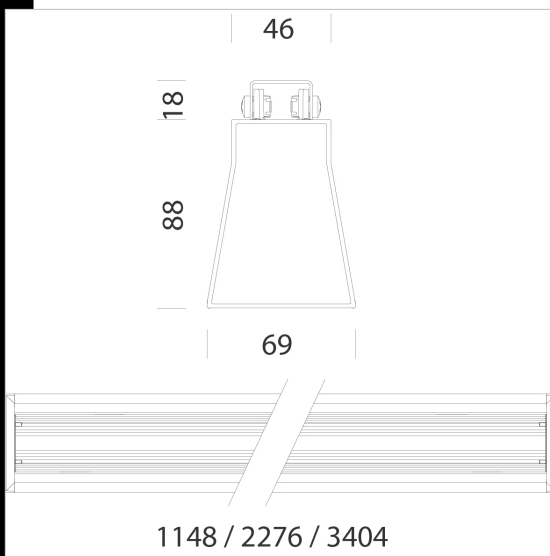

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010313-00	CLD	3,30	LED-3091lm-4000K-CRI 80	29 W	WHITE
22010313-1241	CLD-D-D	3,37	LED-3091lm-4000K-CRI 80	29 W	WHITE
22010313-09	CLD-E	3,69	LED-3091lm-4000K-CRI 80	29 W	WHITE
22010313-39	CLD CELL	0,00	LED-2875lm-3000K-CRI 80	29 W	WHITE
22010313-0928	CLD CELL-E	0,00	LED-2875lm-3000K-CRI 80	29 W	WHITE
22010313-3941	CLD CELL-D-D	0,00	LED-2875lm-3000K-CRI 80	29 W	WHITE
22010314-00	CLD	3,69	LED-6182lm-4000K-CRI 80	56 W	WHITE
22010314-09	CLD-E	3,69	LED-6182lm-4000K-CRI 80	56 W	WHITE
22010314-1241	CLD-D-D	3,69	LED-6182lm-4000K-CRI 80	56 W	WHITE
22010314-31	CLD CELL-E	0,00	LED-6182lm-4000K-CRI 80	55 W	WHITE
22010314-39	CLD CELL	0,00	LED-5749lm-3000K-CRI 80	55 W	WHITE
22010314-3941	CLD CELL-D-D	0,00	LED-5749lm-3000K-CRI 80	55 W	WHITE
22010314-3957	CLD CELL-E	0,00	LED-5749lm-3000K-CRI 80	55 W	WHITE
22010314-0928	CLD CELL-E	0,00	LED-5749lm-3000K-CRI 80	55 W	WHITE
22010315-00	CLD	9,35	LED-9273lm-4000K-CRI 80	81 W	WHITE
22010315-1241	CLD-D-D	3,69	LED-9273lm-4000K-CRI 80	81 W	WHITE
22010315-09	CLD-E	3,69	LED-9273lm-4000K-CRI 80	81 W	WHITE
22010315-31	CLD CELL-E	0,00	LED-9273lm-4000K-CRI 80	82 W	WHITE
22010315-39	CLD CELL	0,00	LED-8624lm-3000K-CRI 80	82 W	WHITE
22010315-3941	CLD CELL-D-D	0,00	LED-8624lm-3000K-CRI 80	82 W	WHITE
22010315-0928	CLD CELL-E	0,00	LED-8624lm-3000K-CRI 80	82 W	WHITE
22010315-3957	CLD CELL-E	0,00	LED-8624lm-3000K-CRI 80	82 W	WHITE

### Accessori



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Ceiling suspension O



- Powered suspension O



- Closing ends 2 - Sintesi



- Sintesi Sensor - light and/or presence detector



- Sintesi Spot - UGR<22 - light module

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Sintesi System - ceiling 25° asymmetric - UGR<22

---

**Accessori**

- Connecting bracket - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated