




### Download

DXF 2D  
- sintesipla.dxf

Montaggi  
- SINTESI-SYSTEM REV3.pdf

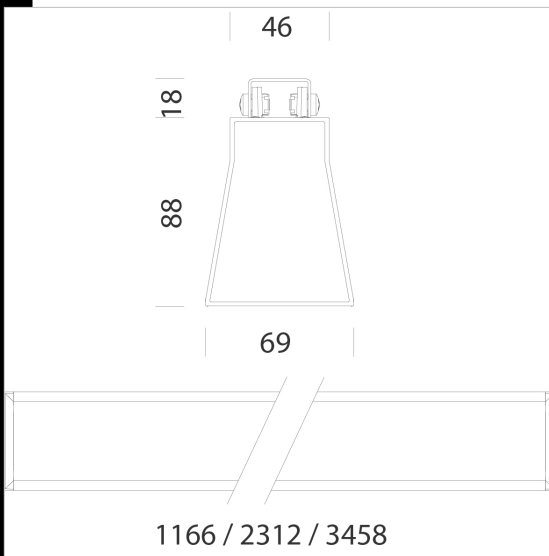

## Sintesi System - ceiling - wide-beam

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: wide-beam lenses in PMMA. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010410-00	CLD CELL	3.92	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010410-1241	CLD CELL-D-D	3.69	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010410-09	CLD CELL-E	3.69	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010410-39	CLD CELL	3.99	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010410-3941	CLD CELL-D-D	3.69	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010410-0928	CLD CELL-E	4.20	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010411-00	CLD CELL	7.78	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010411-1241	CLD CELL-D-D	3.69	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010411-09	CLD CELL-E	8.29	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010411-31	CLD CELL-E	0.00	LED-4876lm-4000K-CRI 80	55 W	WHITE
22010411-39	CLD CELL	7.65	LED-4534lm-3000K-CRI 80	56 W	WHITE
22010411-3941	CLD CELL-D-D	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010411-0928	CLD CELL-E	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010411-3957	CLD CELL-E	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010412-00	CLD CELL	11.29	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010412-1241	CLD CELL-D-D	3.69	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010412-09	CLD CELL-E	3.69	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010412-31	CLD CELL-E	0.00	LED-7314lm-4000K-CRI 80	82 W	WHITE
22010412-39	CLD CELL	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE
22010412-3941	CLD CELL-D-D	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE
22010412-0928	CLD CELL-E	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE
22010412-3957	CLD CELL-E	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE

### Accessories



- Sintesi Spot - UGR<22 - light module



- Closing ends 1 - Sintesi



- Connecting bracket - Sintesi



- Sintesi Sensor - light and/or presence detector

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated