



Download


DXF 2D
- sintesisosp.dxf

Montaggi
- SINTESI-SYSTEM REV3.pdf



Sintesi System - suspension - wide-beam

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: wide-beam lenses in PMMA. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

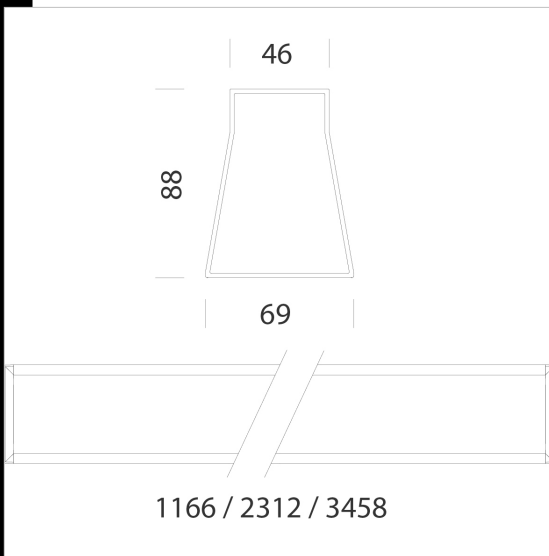

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010413-00	CLD CELL	3.91	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010413-1241	CLD CELL-D-D	3.69	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010413-09	CLD CELL-E	3.69	LED-2438lm-4000K-CRI 80	29 W	WHITE
22010413-39	CLD CELL	4.00	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010413-3941	CLD CELL-D-D	0.00	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010413-0928	CLD CELL-E	0.00	LED-2267lm-3000K-CRI 80	29 W	WHITE
22010414-00	CLD CELL	7.61	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010414-1241	CLD CELL-D-D	3.69	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010414-09	CLD CELL-E	3.69	LED-4876lm-4000K-CRI 80	56 W	WHITE
22010414-31	CLD CELL-E	0.00	LED-4876lm-4000K-CRI 80	55 W	WHITE
22010414-39	CLD CELL	7.59	LED-4534lm-3000K-CRI 80	56 W	WHITE
22010414-3941	CLD CELL-D-D	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010414-0928	CLD CELL-E	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010414-3957	CLD CELL-E	0.00	LED-4534lm-3000K-CRI 80	55 W	WHITE
22010415-00	CLD CELL	3.69	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010415-1241	CLD CELL-D-D	3.69	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010415-09	CLD CELL-E	3.69	LED-7314lm-4000K-CRI 80	81 W	WHITE
22010415-31	CLD CELL-E	0.00	LED-7314lm-4000K-CRI 80	82 W	WHITE
22010415-39	CLD CELL	11.11	LED-6802lm-3000K-CRI 80	81 W	WHITE
22010415-3941	CLD CELL-D-D	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE
22010415-0928	CLD CELL-E	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE
22010415-3957	CLD CELL-E	0.00	LED-6802lm-3000K-CRI 80	82 W	WHITE

Accessories



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Ceiling suspension O



- Powered suspension O



- Closing ends 1 - Sintesi



- Sintesi Sensor - light and/or presence detector



- Sintesi Spot - UGR<22 - light module

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- Connecting bracket - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated