


## Sintesi System - suspension direct/indirect light - wide-beam

Sintesi System is the new linear lighting system by Fosnova with a sober and elegant design, available in a wide range of optics and LED modules. The system can be easily mounted as a suspension lamp for direct and/or indirect lighting, as a ceiling lamp or in continuous lines, making it the most effective choice for any lighting project and obtain the needed lighting level with an efficient use of energy. Housing: in extruded 6060 aluminium alloy. Removable top cover in extruded 6060 aluminium for electrical connection. Closing ends: V0 ABS plastic injection moulded. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0,92. Diffuser: wide-beam lenses in PMMA. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

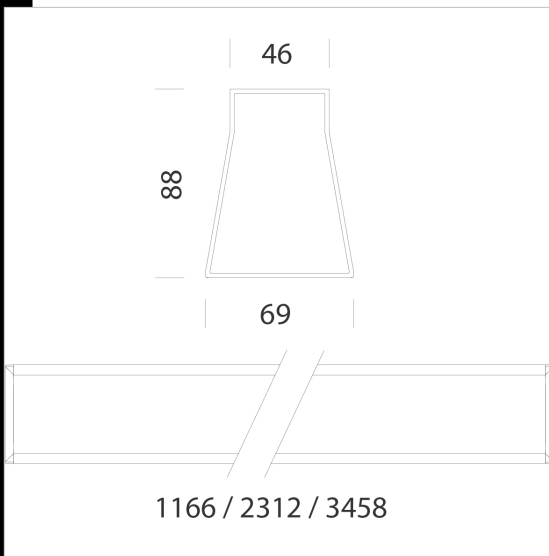

| Code          | Gear         | Kg    | Lumen Output-K-CRI       | WTot  | Colour |
|---------------|--------------|-------|--------------------------|-------|--------|
| 22010416-00   | CLD CELL     | 4,19  | LED-3621lm-4000K-CRI 80  | 40 W  | WHITE  |
| 22010416-1241 | CLD CELL-D-D | 3,69  | LED-3621lm-4000K-CRI 80  | 40 W  | WHITE  |
| 22010416-39   | CLD CELL     | 4,18  | LED-3367lm-3000K-CRI 80  | 40 W  | WHITE  |
| 22010416-3941 | CLD CELL-D-D | 0,00  | LED-3367lm-3000K-CRI 80  | 40 W  | WHITE  |
| 22010417-00   | CLD CELL     | 8,04  | LED-7242lm-4000K-CRI 80  | 76 W  | WHITE  |
| 22010417-1241 | CLD CELL-D-D | 8,12  | LED-7242lm-4000K-CRI 80  | 76 W  | WHITE  |
| 22010417-09   | CLD CELL-E   | 3,69  | LED-7242lm-4000K-CRI 80  | 76 W  | WHITE  |
| 22010417-39   | CLD CELL     | 8,05  | LED-6734lm-3000K-CRI 80  | 76 W  | WHITE  |
| 22010417-3941 | CLD CELL-D-D | 0,00  | LED-6734lm-3000K-CRI 80  | 76 W  | WHITE  |
| 22010418-00   | CLD CELL     | 11,71 | LED-10863lm-4000K-CRI 80 | 106 W | WHITE  |
| 22010418-1241 | CLD CELL-D-D | 11,96 | LED-10863lm-4000K-CRI 80 | 106 W | WHITE  |
| 22010418-09   | CLD CELL-E   | 3,69  | LED-10863lm-4000K-CRI 80 | 106 W | WHITE  |
| 22010418-39   | CLD CELL     | 0,00  | LED-10101lm-3000K-CRI 80 | 106 W | WHITE  |
| 22010418-3941 | CLD CELL-D-D | 0,00  | LED-10101lm-3000K-CRI 80 | 106 W | WHITE  |

### Accessori



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Ceiling suspension O



- Powered suspension O



- Closing ends 1 - Sintesi



- Sintesi Sensor - light and/or presence detector



- Sintesi Spot - UGR-22 - light module



- Connecting bracket - Sintesi



- Suspension with rods Q



- Powered suspension with rods Q

### Download

DXF 2D  
- sintesisosp.dxf

Montaggi  
- SINTESI-SYSTEM REV3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated